National Interoperability Field Operations Guide

U.S. Department of Homeland Security
Office of Emergency Communications
Version 1.5



Homeland Security

January 2014



INTRODUCTION

The National Interoperability Field Operations Guide (NIFOG) is a technical reference for emergency communications planning and for radio technicians responsible for radios that will be used in disaster response. The NIFOG includes rules and regulations for use of nationwide and other interoperability channels, tables of frequencies and standard channel names, and other reference material, formatted as a pocket-sized guide for radio technicians to carry with them.

If you are not familiar with interoperability and mutual aid communications, start with the "How to Use the National Interoperability Field Operations Guide" section.

We encourage you to program as many of these interoperability channels in your radios as possible, as permitted by the applicable regulations. Even if geographic restrictions on some channels preclude their use in your home area, you may have the opportunity to help in a distant location where the restrictions do not apply. Maximize your flexibility.

To download or request copies of the NIFOG, please visit

http://publicsafetytools.info

Your comments are welcome at NIFOG@HQ.DHS.GOV

Thank you.

Ronald T. Hewitt, Director Ross Merlin, Author DHS Office of Emergency Communications

TABLE OF CONTENTS

| USING THE NATIONAL INTEROPERABILITY FIELD OPERATIONS GU | IDE1 |
|--|------|
| FCC Rules for Interoperability | 6 |
| NTIA Rules for Interoperability | 8 |
| How do I request a Special Temporary Authorization (STA)? | 13 |
| Recommendations for Programming the Federal Interoperability Chann | |
| Regulations and Guidelines for National Interoperability | 19 |
| Conditions for Use of Federal Interoperability Channels | 20 |
| Law Enforcement Plans | 21 |
| Incident Response Plans | 22 |
| FCC Rules and Regulations | |
| NTIA Rules and Regulations | 23 |
| INTEROPERABILITY CHANNELS | 24 |
| Non-Federal VHF National Interoperability Channels | 24 |
| VHF Low Band | |
| VHF High Band | 25 |
| VHF Inland | |
| Counties Where VTAC17/VTAC17D May Be Used | |
| Texas Counties Where VTAC17/VTAC17D May be used | |
| VHF Public Safety Mutual Aid and Common Channels | |
| NOAA Weather Radio "All Hazards" Broadcasts | |
| Federal / Non-Federal SAR Command Interoperability Plan | |
| Federal / Non-Federal VHF SAR Operations Interoperability Plan | |
| VHF Incident Response (IR) Federal Interoperability Channels | |
| VHF Law Enforcement (LE) Federal Interoperability Channels | |
| UHF Incident Response (IR) Federal Interoperability Channels | |
| UHF Law Enforcement (LE) Federal Interoperability Channels | |
| Non-Federal UHF National Interoperability Repeater Channels | |
| UHF MED (Medical, EMS) Channels | |
| 700 MHz Nationwide Interoperability Channels | |
| Non-Federal 800 MHz National Mutual Aid Repeater Channels | |
| 25 Cities Project Federal Interoperability Channels | 50 |

| COMMON COMMUNICATIONS REFERENCES | 56 |
|--|----|
| Operations Center Telephone Numbers | 56 |
| Emergency Support Functions (ESF) | 57 |
| FEMA Regions - States and Territories | 58 |
| U.S. Coast Guard Rescue Coordination Centers | 59 |
| CTCSS Tones and Codes | 60 |
| DCS Codes | 61 |
| P25 Digital Codes | 62 |
| RS-232 Connectors (DB25 and DE9) | 63 |
| RJ-45 Wiring | |
| IP Addresses - Private Networks | 65 |
| Telephone Block Wiring | 66 |
| Telephone Connectors | 68 |
| Telephone Keypad Letters | |
| N11 Numbers | 69 |
| DSN Area Codes | |
| Cellular Telephone Emergency Response | |
| Satellite Phone Dialing Instructions | |
| INMARSAT-M Service Codes | |
| Wireless Priority Service (WPS) | |
| GETS - Govt. Emergency Telecomm. Service | |
| Text Messaging | |
| Line-of-Sight Formulas | |
| Notice to Airmen (NOTAM) Filing Instructions | 78 |
| COMMONLY USED FREQUENCIES | 79 |
| Aviation Frequencies | 79 |
| VHF Marine Channel Listing | 80 |
| VHF Marine Channels & Frequencies | 84 |
| Multi-Use Radio Service (MURS) | 89 |
| GMRS Frequencies | 90 |

| FRS Frequencies | 90 |
|--|-----|
| CB Frequencies | |
| Common Business Frequencies | |
| Railroad Frequencies | |
| SAR (Search And Rescue) Frequencies | |
| Maritime HF and VHF Distress Frequencies | |
| HF Disaster Communications | |
| HF Long Distance Communications | |
| Standard Time and Frequency Broadcasts | 97 |
| Standard Time by Telephone | |
| Amateur Radio Emergency Frequencies | |
| Amateur Radio Calling Frequencies | |
| Amateur Radio Repeater Coordinators | |
| Amateur Radio Bands (US) | |
| Amateur Radio Power Limits (US) | 107 |
| | |
| NOTES | 108 |

USING THE NATIONAL INTEROPERABILITY FIELD OPERATIONS GUIDE

What is the "National Interoperability Field Operations Guide"?

interoperability is required, and other information useful to emergency communicators. mobile radio (LMR) frequencies that are often used in disasters or other incidents where radio The "National Interoperability Field Operations Guide" (NIFOG) is a pocket-sized listing of land

Terms used in this document:

- FCC Federal Communications Commission
- FCC Rules contained in Title 47, Code of Federal Regulations (47CFR)
- Federal used herein to differentiate between radio stations of the United States Government and individuals. the FCC is a Federal Government agency, the frequencies it administers are not "federal refer to frequencies (channels) available for assignment to U.S. Government Agencies. Although and those of any State, tribal, local, or regional governmental authority. "Federal Frequencies" frequencies" - they are administered for state/tribal/local governments, commercial entities,
- NCC (1) the Public Safety National Coordination Committee, a Federal Advisory Committee munications. formed by the FCC to advise it on interoperability; (2) National Coordinating Center for Telecom-

- NPSTC the National Public Safety Telecommunications Council is a federation of organizations http://www.npstc.org/documents/APCO-NPSTC-ANS1-104-1web.pdf the "Standard Channel Nomenclature for the Public Safety Interoperability Channels", APCO ANS establish a common channel nomenclature. NPSTC channel IDs used in the NIFOG are based on collaborative leadership. After the charter for the NCC expired, NPSTC continued NCC's efforts to 1.104.1-2010, approved June 9, 2010 by the American National Standards Institute (ANSI) - see whose mission is to improve public safety communications and interoperability through
- NTIA National Telecommunications and Information Administration
- NTIA Manual The NTIA "Manual of Regulations and Procedures for Federal Radio Frequency Management" http://www.ntia.doc.gov/osmhome/redbook/redbook.html
- Radio frequencies are in MegaHertz (MHz) unless otherwise noted.
- CTCSS tone frequencies are in Hertz (Hz) or two-character Motorola codes
- Emissions on frequencies above 30 MHz are narrowband analog FM, unless otherwise noted.

How is the NIFOG used?

regulations, rather than waiting until a disaster is imminent or occurring to do the programming having these channels programmed in radios at all times, as permitted by the applicable The NIFOG may be used by radio technicians when programming channels in radios. We recommend

another discipline or jurisdiction. information on the interoperability channels most likely to be in the radios of responders from The NIFOG also is a useful tool for emergency communications planners, providing them with

Don't I need a license for these channels before programming them into radios?

connection with mutual activities" (see FCC rules 90.427 and 90.417). directly to the imminent safety-of-life or property" or "with U.S. Government stations ... in maritime or aviation) that you are not licensed to use IF "the communications involved relate If you are licensed under Part 90 of the FCC rules, you may program frequencies (other than

to an imminent threat to safety-of-life or property. exceptions to the general prohibition on using non-licensed frequencies are limited to responding Because one overriding policy concern of the FCC is the prevention of harmful interference, any only when the communications involved "relate directly" to the "imminent" safety of life or property. terminated." Also, the safety of life provision of 90.417(a) makes it clear that the exception applies safety-of-life or property, the transmissions shall be suspended as soon as the emergency is However, note that 90.403(g) requires that "[f]or transmissions concerning the imminent

radiotelephone operator's license (47 CFR 80.203(b)(3). See also 80.203(b)(4) and §80.169(a). second class radiotelegraph operator's certificate, a radiotelegraph operator license, or a general Programming of maritime channels must be performed only by a person holding a first or communications facilities and §90.411 dealing with civil defense communications. See also 90.407 dealing with communications during an emergency which disrupts normal

see §87.73. adjustments or tests during installation, servicing or maintenance of an aeronautical radio station A general radiotelephone operator must directly supervise and be responsible for all transmitter

There are no restrictions on programming frequencies into U.S. Government radios.

How can I use these frequencies if I don't have a license for them?

There are seven ways you can legally use these radio frequencies:

- You or your employer may already have a Federal Communications Commission (FCC) license or a National Telecommunications and Information Administration (NTIA) authorization for some of the interoperability and mutual aid frequencies.
- 2. For FCC licensees, the non-Federal National Interoperability Channels VCALL10-VTAC14 and required. Line A and C are defined in 47CFR90.7. You can check a location for Line A and Line C radiated power (ERP) of 3 watts or less. At higher power levels, frequency coordination is 00-348 applies only to mobile (including hand-held) stations operating with an effective 90.525(a) for 700 MHz; see FCC 87-112, paragraph 34 (released December 18, 1987), for 800 paragraph 90 (released October 10, 2000) for VHF and UHF; see FCC rules 90.421(a)(3) and mobile units on these interoperability channels without an individual license." See FCC 00-348 are covered by a "blanket authorization" from the FCC - "Public safety licensees ... can operate VTAC33-38, UCALL40-UTAC43D, the 800 MHz interoperability channels, and 8CALL90-8TAC94D restrictions at http://wireless.fcc.gov/uls/index.htm?job=line_a_c MHz. When above Line A or East of Line C the blanket authorization in paragraph 90 of FCC
- You may operate on frequencies authorized to another licensee when that licensee designates you as a unit of their system, in accordance with FCC rule 90.421
- 4. In extraordinary circumstances, the FCC may issue a "Special Temporary Authority" (STA) for such use in a particular geographic area.

- 5. In extraordinary circumstances, the NTIA may issue a "Temporary Assignment" for such use in a particular area
- If you are an FCC Part 90 licensee, you may operate a mobile station on the Federal stations — these are not a substitute for your regular mutual aid channels. See FCC Public Notice **may not** use these channels for interoperability with other State, tribal, regional, or local radio interoperability with Federal radio stations authorized by the NTIA to use those channels. You DA 01-1621, released July 13, 2001. Interoperability Channels only when authorized by the FCC (by license or STA) and only for
- When necessary for the IMMEDIATE protection of life or property, FCC Part 90 licensees may any Part 90 frequency with the permission of the FCC licensee when such use is necessary for communications directly related to the emergency at hand communications". **U.S. Government stations** are authorized by NTIA rule 7.3.6 to operate on use prudent measures beyond the specifics of their license. See FCC rule 90.407, "Emergency

FCC Rules for Interoperability

90.407 Emergency communications.

such special use of the authorized facilities. [49 FR 36376, Sept. 17, 1984] other than that specified in the station authorization or in the rules and regulations governing earthquake or similar disaster, utilize such station for emergency communications in a manner in which the normal communication facilities are disrupted as a result of hurricane, flood, the operation of such stations. The Commission may at any time order the discontinuance of The licensee of any station authorized under this part may, during a period of emergency

90.411 Civil defense communications.

the authorized facilities. drills and tests. The Commission may at any time order the discontinuance of such special use of station by local civil defense authorities during an actual or simulated emergency, including communications necessary for the implementation of civil defense activities assigned such The licensee of any station authorized under this part may, on a voluntary basis, transmit

[49 FR 36376, Sept. 17, 1984]

(FCC Rules for Interoperability - continued)

90.417 Interstation communication.

- the imminent safety-of-life or property. restriction as to type, service, or licensee when the communications involved relate directly to (a) Any station licensed under this part may communicate with any other station without
- approval of the Commission must be obtained, and such communication must be permitted by mutual activities, provided that where the communication involves foreign stations prior under this part, with U.S. Government stations, and with foreign stations, in connection with the government that authorizes the foreign station.... (b) Any station licensed under this part may communicate with any other station licensed

90.421 Operation of mobile station units not under the control of the licensee.

units may be operated by persons other than the licensee ... Mobile stations, as defined in § 90.7, include vehicular-mounted and handheld units. Such

90.423 Operation on board aircraft.

Allowed on most Public Safety frequencies up to 1 mile altitude, up to 10 watts, secondary to land-based systems; for air-to-mobile, air-to-base, air-to-air, and air-toship communications

90.427 Precautions against unauthorized operation.

- (a) ...
- transmitter frequencies for which the licensee using the transmitter is not authorized (b) Except for frequencies used in accordance with § 90.417, no person shall program into a

NTIA Rules for Interoperability

Life or Property 7.3.4 Emergency Communications for which an Immediate Danger Exists to Human

- In situations where immediate danger exists to human life or property, an agency may operate only as long as necessary to ensure that the danger to human life or property no longer exists. such time as normal/routine operations can be reestablished Emergency operations under these circumstances shall be reevaluated on a regular basis until terms of an existing assignment. Emergency operations under such situations should continue temporarily on any regularly assigned frequency in a manner other than that specified in the
- 2. Interoperable communications for disaster/emergency response involving Federal, State, local, and regarding interoperable communications can also be found in the National Interoperability Field tribal entities shall be in conformance with Section 4.3.16 of this Manual. Additional information Operations Guide (NIFOG) ... promulgated by the Department of Homeland Security.

7.3.6 Emergency Use of Non-Federal Frequencies

emergency at hand. Such use is subject to the following conditions: is necessary for communications with non-Federal stations and is directly related to the non-Federal radio station, under Part 90 of the FCC Rules and Regulations, when such use In emergency situations, a Federal radio station may utilize any frequency authorized to a

- The non-Federal licensee has given verbal or written concurrence.
- Operations are conducted in accordance with the FCC Rules and Regulations.

(NTIA Rules for Interoperability - continued)

- c. Use is restricted to the service area and station authorization of the licensee
- All operations are under the direct control of the licensee and shall be immediately terminated when directed by the licensee
- e. Operations do not exceed 60 days.
- A written report of each such use shall be provided, through the agency's FAS [Frequency Assignment Subcommittee, of NTIA's IRAC (Interdepartment Radio Advisory Committee)] representative, to the FCC as soon as practicable.

7.5.2 Frequencies Authorized by the FCC for Ship Stations

mobile service. used by Federal mobile stations to communicate with non-Federal stations in the maritime Frequencies authorized by the Federal Communications Commission for ship stations may be

7.5.3 Frequencies for the Safety of Life and Property

used for search and rescue communications. information is not available and for emergency communications. This frequency also may be this channel is limited to communications necessary to establish contact when other channel \dots (5) The frequency 40.5 MHz is designated as the military joint common frequency. Use of

(NTIA Rules for Interoperability - continued)

and obtain help. (See ITU Radio Regulation Ap. 13 Part A1, § 6,1.) distress from using any frequency at its disposal to attract attention, make known its position, (6) The provisions of this Manual do not prevent mobile stations, or mobile earth stations, in

7.5.4 Frequencies for Coordinating Search and Rescue Operations

- search and rescue operations aeronautical mobile service and by other mobile and land stations engaged in coordinated ... (2) The frequency 123.1 MHz, using class A3E emission, may be used by stations of the
- and rescue (SAR) operations. When control of the scene of a SAR incident is under a Coast Guard between ship stations and aircraft stations, using G3E emission, engaged in coordinated search coast station, 156.3 MHz may be used by ship stations to communicate with that coast station. (3) The frequency 156.3 MHz [VHF Marine channel 6] may be used for communications

Does the NIFOG authorize me to use certain frequencies?

come only from the FCC or the NIIA NO. The NIFOG does not grant authority to operate on any radio frequencies. Such authority can

Is the NIFOG the national emergency communications plan?

of such an arrangement. The NIFOG does NOT supersede any Federal, State, tribal, local, or regional arrangement was promulgated by local authorities, or where emergency responders are unaware The NIFOG is the national guide for possible use in a situation where no other radio interoperability

useful suggestions for which frequencies to use to attempt initial contact. other information on how to make contact with other emergency responders, the NIFOG provides emergency communications plan. If you are dispatched to a disaster or incident scene and have no

Are the interoperability channels discussed in the NIFOG available nationwide?

limited to 3 watts ERP; higher power requires frequency coordination with Canada. VTAC and UCALL/UTAC channels by mobiles (and hand-helds) North of Line A / West of Line C is on-channel uses that are different than the common uses described in the NIFOG. Use of the VCALL/ be usable due to the potential for adjacent channel interference in some areas, or due to authorized VTAC17/VTAC17D May Be Used on #page 27 for further details). Other channels in this plan may not of the country, away from coastal areas and major waterways (see the map titled Counties Where the "Non-Federal VHF Inland Interoperability Channels" may be used only in certain inland parts No. Not all frequencies are available nationwide for use as described in the NIFOG. In particular,

For a detailed list of which counties are in which VHF Public Coast (VPC) area, see: FCC online area cross-reference search: http://www.fcc.gov/fcc-bin/cesearch.pl http://www.fcc.gov/oet/info/maps/areas/data/2000/README_FCCCNTY2K.txt http://www.fcc.gov/oet/info/maps/areas/data/2000/FCCCNTY2K.txt and

Who do I contact to use interoperability channels?

authorization to use additional channels as needed assigning specific uses to available radio channels and coordinating with the FCC and NTIA for a STA. The COML (Communications Unit Leader) acts as, or delegates the role of frequency manager; These channels can be used where licensed or authorized by FCC or NTIA, including authorization by

At a Federally-declared disaster where a Joint Field Office (JFO) is established channels specified in the NIFOG at or near the command post, incident scene, or staging area. If access to the COML has not been pre-arranged or is not working as planned, try the calling

provides direct access to the FCC and NTIA decision-makers responders with State and local government authorities. The Wireless Communications Manager Communications Manager and he/she coordinates the use of radio frequencies used by Federal and the internal communications personnel in the Logistics Section. This individual is the Wireless for the broad incident working with both the external communications personnel in the DEC Group JFO Operations Section. The DEC Group may have personnel filling the role of Spectrum Manager the Disaster Emergency Communications (DEC) Group (ESF #2 - Communications), which is in the local infrastructure, as well as Federal assets supporting local disaster operations, is the focus of Communications for those affected by the disaster, including local first responders, victims, and the responsibility of the JFO Communications Unit, which is under the Logistics Section. that contradict ICS? "Communications" is under the Logistics Section and the Operations Section - doesn't No, there is no contradiction. Communications for the personnel working in the JFO is

How do I request a Special Temporary Authorization (STA)?

FCC licensees request a Special Temporary Authorization (STA) from the FCC:

Tracy Simmons - STA Licensing (Part 90--Land Mobile and Public Safety), Public Safety & Homeland During Normal FCC Business Hours (Monday through Friday, 8:00am - 5:30pm EST/EDT)

or file electronically: FCC Form 601 - ULS http://wireless.fcc.gov/uls/ then click on Online Filing "LOG IN" Security Bureau - phone: 717-338-2657 email: Tracy.Simmons@fcc.gov

Outside of Normal FCC Business Hours (5:30pm - 8am EST/EDT, weekends, and holidays)

First Responders and Public Safety Entities with general STA inquiries

phone: 202-418-1122 email: - FCC0PS@fcc.gov

FCC Operations Center (FCCOC)

phone: 202-418-7949 email: Zenji.Nakazawa@fcc.gov Zenji Nakazawa, Deputy Division Chief, Public Safety & Homeland Security Bureau

FCC Operations Center (FCCOC) phone: 202-418-1122 email: - FCCOPS@fcc.gov

tee (IRAC). See NTIA Manual section 8.3.32. tive to the Frequency Assignment Subcommittee (FAS) of the Interdepartment Radio Advisory Commit-U.S. Government radio stations request temporary assignment or STAs via their agency representa-

[See the previous page for requesting STAs when a Joint Field Office is operational for an incident.] The telephone number for the NTIA Frequency Assignment Branch is 202-482-1132

Does the NIFOG specify exactly how to program channels?

see "NPSTC" on page 2. "Standard Channel Nomenclature for the Public Safety Interoperability Channels" for channel names No. There is no one-size-fits-all solution due to differing radio designs. The NIFOG uses the ANS

both modes are available. switch or button to enable or disable receive CTCSS; if not, another channel may be programmed so a repeater channel, and using this feature saves memory slots. Similarly, some radios may have a repeaters which takes an additional memory slot. Some radios have a switch for talk-around on For some channels, the standard nomenclature specifies a "direct" ("talk-around") channel for

authorized channel uses and http://www.navcen.uscg.gov/?pageName=mtVhf for frequencies. by drawbridge tenders may be appropriate; see http://wireless.fcc.gov/marine/vhfchanl.pdf for (for use when properly authorized), based on local or regional use. In particular, channels used Consider programming additional VHF Marine channels as possible interoperability channels

otherwise use CSQ on receive. on receive. Consider allowing the user to enable or disable CTCSS on receive by a switch or button; always be transmitted on the analog channels, but carrier squelch (CSQ, no CTCSS) should be used 16 (CTCSS 167.9 Hz); use P25 digital for the remaining LE channels, NAC \$68F (1679_{in}). CTCSS should Response channels (CTCSS 167.9 Hz) and Law Enforcement channels LE A, LE 1, LE B, LE 10, and LE Recommended modes for using Federal Interoperability Channels: use analog for all Incident

How do emergency responders use the calling channels?

talk-around for this repeater channel is known as "IR 5". For example, the VHF Incident Response Federal Interoperability Channel is known as "NC 1". The that capability. In some cases, the talk-around channel exists as a distinct channel on the radio. repeater channel and you get no response, try the "direct" or "talk-around" mode if your radio has attempt to make contact on one of the designated interoperability calling channels. If it is a or working channel. If you can't make contact, or if no channel was designated for this purpose, As you approach an incident scene or staging area, you might establish contact on a dispatch

to radio traffic on one of these channels. of life or property". You may be able to learn what you need without transmitting, by just listening channels — if you are authorized to use them, or if your situation qualifies as "IMMEDIATE protection "LEB". If you are unable to make contact on these channels, consider the wideband interoperability the Federal IR and LE calling channels are "NC 1" (direct: "IR 5"), "NC 2" (direct: "IR 15"), "LE A", and The non-Federal national interoperability calling channels are VCALL10, UCALL40, and 8CALL90;

coordinate by radio? How do Search and Rescue personnel on land, on watercraft, and on aircraft

to exercise great restraint in using these channels only when authorized organizations with VHF radios to program the appropriate VHF Marine channels in their radios and to obtain licenses for this frequency to facilitate interoperability. Likewise, we encourage SAR areas. Also, 155.16 MHz is licensed to many SAR organizations. We encourage public safety entities operations — they are in this plan due to the likelihood of boats being involved in SAR in coastal radios. VHF Marine channels shall not be used for conventional, terrestrial search and rescue We recommend that SAR participants have the channels in this plan pre-programmed in their VHF radios that many ground SAR groups use are capable of covering the VHF Marine frequencies. three communities. Some aircraft involved in SAR have VHF Marine radios, as do most boaters; the each other to coordinate rescues. There is no VHF channel authorized and readily available to all interoperability. Searchers on land, in boats, and in aircraft need to be able to communicate with Certain VHF Marine channels are designated in this plan for Search and Rescue (SAR)

programmed, and vice versa: Should Fire/EMS radios have the Law Enforcement interoperability channels

designated for other incident support if that would not hamper Law Enforcement activities, and if Enforcement" (LE) channels will be used "primarily" for Law Enforcement activities, but could be Response" (IR) means everybody — Fire, Rescue, EMS, Public Works, Law Enforcement, etc. The "Law crossing jurisdictional and functional lines. On the Federal interoperability channels, "Incident programmed as possible, as permitted by the applicable regulations. Interoperability may require Yes. Radios for public safety personnel should have as many of these interoperability channels

Operations Guide", or how can I offer suggestions to improve it? How can I get answers to questions about the "National Interoperability Field

assigned by the agency in control of the incident.

organization affiliation, and your e-mail address of Emergency Communications, at NIFOG@HQ.DHS.GOV and include your name, agency or Please send your questions or comments to the U.S. Department of Homeland Security, Office

How do I get copies of the NIFOG?

The latest version of the NIFOG can be downloaded or ordered from http://publicsafetytools.info

Recommendations for Programming the Federal Interoperability Channels

- 1. If there is enough room in your radio, program all channels as analog and again as digital channels. If not, program as follows:
- a. Incident Response channels all analog.
- Law Enforcement channels program all as P25 digital with NAC \$68F (1679₁₀) except 167.9 Hz (6Z) and no Rx CTCSS (carrier squelch, CSQ) LEA, LE 1, LEB, LE10, and LE 16 which are to be programmed analog with Tx CTCSS
- If your radio has a user-selectable option to enable/disable CTCSS on receive, you may choose to configure this option so that the user can enable the same CTCSS tone used on transmit for receive. The default configuration should be CSQ receive

are used. interoperability. A Federal entity must be involved when these nels may not be used for state/state, state/local, or local/local Note on using the Federal Interoperability Channels: These chan-

Regulations and Guidelines for National Interoperability

- 1. The FCC and NTIA rules allow for some flexibility in frequency use by personnel directly involved an emergency, anything goes." in a situation where there is imminent danger to human life or property. This does NOT mean "In
- 2. For communications not covered by #1, your use of a radio frequency must be authorized by: a. Your (or your agency's) FCC license or NTIA authorization
- b. "License by rule" a provision in FCC rules that authorizes use of a radio frequency under specified conditions without a specific license or authorization issued to the user
- c. A "Special Temporary Authorization" provided by FCC or NTIA
- 3. Digital P25 operations on non-Federal interoperability channels should transmit the default incoming NAC). Specify talkgroup \$FFFF (65535₁₀), which includes everyone Network Access Code (NAC) \$293 (659₁₁), and receive with NAC \$F7E (3966₁₁) (accept any
- Default modes for using Federal Interoperability Channels: use analog for all Incident Response the remaining LE channels, NAC \$68F (1679₁₀). channels and Law Enforcement channels LE A, LE 1, LE B, LE 10, and LE 16; use P25 Digital for

Conditions for Use of Federal Interoperability Channels

- The "VHF Incident Response (IR) Federal Interoperability Channel Plan", the "UHF Incident enforcement and public safety incident response interoperability requirements. These frequencies will be referred to hereinafter as "Federal Interoperability Channels". Channel Plan" show frequencies available for use by all Federal agencies to satisfy law Interoperability Channel Plan", and the "UHF Law Enforcement (LE) Federal Interoperability Response (IR) Federal Interoperability Channel Plan", the "VHF Law Enforcement (LE) Federal
- 2. The Federal Interoperability Channels are available for use among Federal agencies and requirement to operate between Federal agencies and non-federal entities with which Federal agencies have a
- 3. The channels are available to non-federal entities to enable joint Federal/non-federal interoperability communications and are not authorized for routine or administrative uses operations for law enforcement and incident response, subject to the condition that harmful interference will not be caused to Federal stations. These channels are restricted to
- 4. Extended operations and congestion may lead to frequency conflicts. Coordination with NTIA is required to resolve these conflicts.
- Only narrowband emissions are to be used on the Federal Interoperability Channels

- 6. Equipment used (transmitters and receivers) must meet the standards established in Section 5.3.5.2 of the NTIA Manual:
- a. TIA/EIA 603-B for narrowband analog;
- b. TIATSB 102.CAAB-A for narrowband digital
- 7. A complete listing of conditions for use by Federal users can be found in Section 4.3.16 of the NTIA Manual.
- 8. Use of these frequencies within 75 miles of the Canadian border and 5 miles of the Mexican border require special coordination and in some cases will not be available for use.

Law Enforcement Plans

- 1. Frequencies 167.0875 MHz and 414.0375 MHz are designated as National Calling Channels for Interoperability Channel Plans. initial contact and will be identified in the radio as indicated in the Law Enforcement Federal
- 2. Initial contact communications will be established using narrowband analog FM emission (11K25F3E).
- 3. The interoperability channels will be identified in mobile and portable radios as indicated in Squelch Systems (CTCSS) frequency 167.9 Hz and/or Network Access Code (NAC) \$68F (1679₁₀). the Law Enforcement Federal Interoperability Channel Plans with Continuous Tone-Controlled

Incident Response Plans

- Frequencies 169.5375 MHz (paired with 164.7125 MHz) and 410.2375 MHz (paired with the radio as indicated in the Incident Response Federal Interoperability Channel Plans. 419.2375 MHz) are designated as the calling channels for initial contact and will be identified in
- 2. Initial contact will be established using narrowband analog FM emission (11K25F3E).
- 3. To ensure access by stations from outside the normal area of operation, Continuous Tone-Controlled Squelch Systems (CTCSS) will not be used on the calling channels.
- 4. The interoperability channels will be identified in mobile and portable radios as indicated in the (IR) Federal Interoperability Channel Plan". "VHF Incident Response (IR) Federal Interoperability Channel Plan" and the "UHF Incident Response

FCC Rules and Regulations

Title 47, Code of Federal Regulations, Parts 0-199

http://wireless.fcc.gov/rules.html

Part 80 Maritime Services

For information on VHF Marine channels, see

http://www.navcen.uscg.gov/?pageName=mtVhf

http://www.navcen.uscg.
Part 87 Aviation Services

Part 90 Private Land Mobile Radio Services
Part 95 Personal Radio Services (includes GMRS, FRS, CB, & MURS)

Part 97 Amateur Radio Service

NTIA Rules and Regulations

Title 47, Code of Federal Regulations, Part 300

http://www.ntia.doc.gov/osmhome/redbook/redbook.html

INTEROPERABILITY CHANNELS

| NO | n-rederal VHF N | Non-rederal VHF National Interoperability Channels VHF Low Band | perability chan | neis |
|-----------------|-------------------|---|---------------------------------|-----------------|
| Description | Channel Name | Mobile Receive Frequency | Mobile Transmit Frequency | CTCSS Tone ± |
| Law Enforcement | LLAW1 | 39.4600 | 45.8600 | CSQ /156.7 (5A) |
| Law Enforcement | LLAW1D | 39.4600 | 39.4600 | CSQ /156.7 (5A) |
| Fire (Proposed) | LFIRE2 | 39.4800 | 45.8800 | CSQ /156.7 (5A) |
| Fire (Proposed) | LFIRE2D | 39.4800 | 39.4800 | CSQ /156.7 (5A) |
| Law Enforcement | LLAW3 | 45.8600 | 39.4600 | CSQ /156.7 (5A) |
| Law Enforcement | LLAW3D | 45.8600 | 45.8600 | CSQ /156.7 (5A) |
| Fire (Proposed) | LFIRE4 | 45.8800 | 39.4800 | CSQ /156.7 (5A) |
| Fire | LFIRE4D | 45.8800 | 45.8800 | CSQ /156.7 (5A) |
| Frequency 39. | 4800 MHz is pendi | Frequency 39.4800 MHz is pending FCC assignment for exclusive fire intersystem use. | for exclusive fire in | ntersystem use. |
| | - | | | |

gramming the radio, the indicated CTCSS tone also could be programmed for receive, and the user instructed how and when to enable/disable. \pm Default operation should be carrier squelch receive, CTCSS transmit. If the user can enable/disable without repro-

| | Non-Fed | Non-Federal VHF National Interoperability Channels VHF High Band | roperability Channels nd | |
|-------------|---------------------|---|--|--------------------|
| Description | Channel Name | Mobile Receive Freq. | Mobile Receive Freq. Mobile Transmit Freq. | CTCSS Tone |
| Calling | VCALL10 | 155.7525 | 155.7525 | CSQ / 156.7 (5A) ± |
| Tactical | VTAC11 * | 151.1375 | 151.1375 | CSQ / 156.7 (5A) ± |
| Tactical | VTAC12 * | 154.4525 | 154.4525 | CSQ / 156.7 (5A) ± |
| Tactical | VTAC13 | 158.7375 | 158.7375 | CSQ / 156.7 (5A) ± |
| Tactical | VTAC14 | 159.4725 | 159.4725 | CSQ /156.7 (5A) ± |
| Tac Rpt | VTAC33*• | 159.4725 | 151.1375 | CSQ / 136.5 (4Z) |
| Tac Rpt | VTAC34*• | 158.7375 | 154.4525 | CSQ / 136.5 (4Z) |
| Tac Rpt | VTAC35• | 159.4725 | 158.7375 | CSQ / 136.5 (4Z) |
| Tac Rpt | VTAC36*• | 151.1375 | 159.4725 | CSQ / 136.5 (4Z) |
| Tac Rpt | VTAC37 * • | 154.4525 | 158.7375 | CSQ / 136.5 (4Z) |
| Tac Rpt | VTAC38• | 158.7375 | 159.4725 | CSQ / 136.5 (4Z) |

^{*}VTAC11-12, VTAC33-34, and VTAC36-37 may not be used in Puerto Rico or the USVI

user instructed how and when to enable/disable. without reprogramming the radio, the indicated CTCSS tone also could be programmed for receive, and the ±Default operation should be carrier squelch receive, CTCSS transmit. If the user can enable/disable

VTAC33-38 recommended for deployable tactical repeater use only (FCC Station Class FB2T)

All channels on this page are NARROWBAND only. Limited to 3 watts ERP above Line A or East of Line C. VTAC36-38 are preferred; VTAC33-35 should be used only when necessary due to interference.

| Non-Feder: | al VHF National In | Non-Federal VHF National Interoperability Channels | els |
|--------------------------|--------------------|--|-----------------|
| | VHF Inland | ınd | |
| Description | Channel Name | Channel Name Mobile RX (MHz) | Mobile TX (MHz) |
| Tactical — narrowband FM | VTAC17 | 161.8500 | 157.2500 |
| Tactical – narrowband FM | VTAC17D | 161.8500 | 161.8500 |
| | | | |


enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone also could be Default operation should be carrier squelch receive, CTCSS 156.7 Hz(5A) transmit. If the user can programmed for receive, and the user instructed how and when to enable/disable.

grandfathered public coast and public safety licensees. See FCC rule 90.20(g)(3). stations: 20 watts max, antenna HAAT 15 feet max. These channels are for tactical use and may not map on next page. In these authorized areas, interoperability communications have priority over in certain inland areas at least 100 miles from a major waterway. These channels use the same frequencies as VHF Marine channel 25, which uses wideband FM. Use only where authorized. See be operated on board aircraft in flight. These channels use narrowband FM and are available only For VTAC17/VTAC17D only: Base stations: 50 watts max, antenna HAAT 400 feet max. Mobile

All channels on this page are NARROWBAND only. Limited to 3 watts ERP above Line A or East of Line C. "Blanket authorization" does not apply - use of these channels must be licensed, or authorized by STA

Counties Where VTAC17/VTAC17D May Be Used

Numbers Indicate VHF Public Coast Station Areas - see 47CFR80.371(c)(ii)

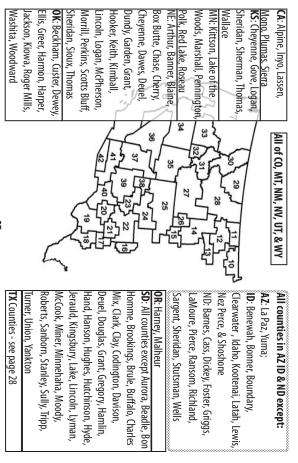

Texas Counties Where VTAC17/VTAC17D May be used

(see page 27)

| | Dallam | Culberson | Crosby | Crockett | Crane | Cottle | Concho | Collingsworth | Coke | Cochran | Childress | Castro | Carson | Callahan | Briscoe | Brewster | Borden | Bailey | Armstrong | Andrews | |
|--------|----------|-----------|----------|----------|-----------|------------|---------|---------------|-----------|---------|-----------|----------|--------|-----------|---------|-----------|------------|---------|------------|----------|---------------|
| | Howard | Hockley | Haskell | Hartley | Hansford | Hall | Hale | Gray | Glasscock | Garza | Gaines | Floyd | Fisher | El Paso | Edwards | Ector | Donley | Dickens | Deaf Smith | Dawson | |
| - 28 - | Mitchell | Midland | Menard | Martin | McCulloch | Lynn | Lubbock | Loving | Lipscomb | Lamb | Knox | Kinney | King | Kimble | Kent | Jones | Jeff Davis | Irion | Hutchinson | Hudspeth | (acc bage zi) |
| | Sutton | Stonewall | Sterling | Sherman | Scurry | Schleicher | Runnels | Roberts | Reeves | Reagan | Randall | Presidio | Potter | Pecos | Parmer | Oldham | Ochiltree | Nolan | Motley | Moore | |
| | | | | | | | | | | Yoakum | Winkler | Wheeler | Ward | Val Verde | Upton | Tom Green | Terry | Terrell | Taylor | Swisher | |

VHF Public Safety Mutual Aid and Common Channels

WARNING: These frequencies are NOT covered by the blanket authorization for nationwide interoeprability channels. A valid FCC license for these frequencies is required. Availability subject to other licensed users in the same area.

| ,, | in talla i se lisello toi silsos li salastisco lo talan sai irialiaminto o ambiento o silici lisello sa apero li tile pallis alsai | מטווני) שמוכנינים סנווכו ווכנווסכ | מ מסכוס ווו נווכ סמוווכ מוכמי |
|--|---|------------------------------------|--|
| Frequency (MHz) | Usage | Channel Name | Note |
| 155.1600 | Search and Rescue Common VSAR16 Not restricted to SAR by (CTCSS 127.3 transmit & receive)(a.k.a.SAR NFM & SAR160) FCC; availability varies. | VSAR16 (a.k.a.SAR NFM & SAR160) | Not restricted to SAR by FCC; availability varies. |
| 154.2650 mobile | Fire Mutual Aid | VFIRE22 | |
| 154.2725 base/mob. | Fire Mutual Aid | VFIRE24 | Not available in Directo |
| 154.2800 base/mob. | Fire Mutual Aid | VFIRE21 | Disc and the H.C. Viscin |
| 154.2875 base/mob. | | VFIRE25 | Kico alia tile o.s. viigiii |
| 154.2950 mobile | Fire Mutual Aid | VFIRE23 | Islands. |
| 154.3025 base/mob. | | VFIRE26 | |
| 155.3400 base/mob. | EMS Mutual Aid | VMED28 | May be designated for EMS Mutual Aid. |
| 155.3475 base/mob. | | VMED29 | May be designated for EMS Mutual Aid. |
| 155.4750 base/mob. | Law Enforcement Mutual Aid | VLAW31 | |
| 155.4825 base/mob. | Law Enforcement Mutual Aid | VLAW32 | |
| LICENSING REQUIRE | LICENSING REQUIRED - Rules for use of these channels are contained in 47 CFR 90.20 and NTIA Manual Sec- | s are contained in 47 CFR 90. | 20 and NTIA Manual Sec- |

tion 4.3.11 & 7.3.6. See also "Non-Federal VHF National Interoperability Channels" and "Non-Federal VHF Inland Interoperability Channels" on page 25 - page 28 of this document.

NOAA Weather Radio "All Hazards" Broadcasts

grammed as wideband FM (16K0F3E) RECEIVE ONLY. Some radio manufacturers number the US weather land-mobile radios, frequency order is recommended. channels in the order they came into use, others number them in frequency order. For programming in WX8-WX9 are used for Canada Marine Weather broadcasts in some areas. These channels should be prorelated hazard information 24 hours a day. Channels WX1-WX7 are used in the US & Canada; channels NWR broadcasts National Weather Service (NWS) warnings, watches, forecasts and other non-weather

| 162.525 | 162.500 | 162.475 | 162.450 | 162.425 | 162.400 |
|----------|---|-------------------------------|--------------------------------|---------------------|---------|
| WX6 | WX5 | WX4 | WX3 | WX2 | WX1 |
| (eather) | Weather Radio Broadcasts — Receive Only (WX1-WX7 US & Canada; WX8-WX9 Canada Marine Weather | Broad casts la; WX8-WX9 Ca | eather Radio VX7 US & Canad | W (WX1-W | |

| Marine 21B | Marine 83B |
|-------------|------------|
| WX8 | WX9 |
| 161.650 | 161.775 |
| NOAW .I D I | 1 |

http://www.nws.noaa.gov/nwr/outages.php or call 1-888-886-1227 NOAA Weather Kadio outages or transmitter problems - listing and report form at

| * - for ** | | | ct with Gatew | /ay | | D | |
|--|--------------------------------------|--|--|--|------------------|-----------------|---|
| * If a repeater is not available, su for UTAC43, 8TAC94D for 8TAC94. ***See Conditions for Use of Fede | VHF Marine Ch. 17*** | 8TAC94 (ITAC4 before rebanding) | UTAC43 | VTAC14 | IR 12** | Channel Name* | Federal/I |
| * If a repeater is not available, substitute the corresponding for UTAC43, 8TAC94D for 8TAC94. **See Conditions for Use of Federal Interoperability Channe | 156.8500 (this use requires FCC STA) | 853.0125 (868.0125 before rebanding) | 453.8625 | 159.4725 | 410.8375 | Mobile RX (MHz) | Non-Federal SAR Cor |
| * If a repeater is not available, substitute the corresponding talk-around channel: IR for UTAC43, 8TAC94D for 8TAC94. ***See Conditions for Use of Federal Interoperability Channels on page 20 - page 22. | 156.8500 (this use requires FCC STA) | 808.0125 (823.0125 before rebanding) | 458.8625 | 159.4725 | 419.8375 | Mobile TX (MHz) | Federal / Non-Federal SAR Command Interoperability Plan |
| * If a repeater is not available, substitute the corresponding talk-around channel: IR 18 for IR 12, UTAC43D for UTAC43, 8TAC94D for 8TAC94. ***See Conditions for Use of Federal Interoperability Channels on page 20 - page 22. | none | 156.7 Tx, CSQ Rx (156.7 Rx if user selectable) | 156.7 Tx, CSQ Rx (156.7 Rx if user selectable) | 156.7 Tx, CSQ Rx (156.7 Rx if user selectable) | 167.9 Tx, CSQ Rx | CTCSS | lity Plan |

| Federal / Non-Federal VI | Federal / Non-Federal VHF SAR Operations Interoperability Plan |
|--|---|
| Suggested SAR Function | Frequency (MHz) |
| Ground Operations | 155.1600 narrowband FM |
| Maritime Operations * | 157.050 or 157.150 (VHF Marine ch.21A or 23A) as specified by |
| | USCG Sector Commander |
| Air Operations — civilian | 123.100 MHz AM (may not be used for tests or exercises) |
| Air Operations — USCG/Military | 345.0 MHz AM for initial contact only, then move to 282.8 MHz AM |
| | or other working channel |
| Air rescue assets to air rescue assets (deconflic- | As charted on standard air chart or MULTICOM 122.850 (south or |
| tion) | west sector) & 122.900 MHz (north or east sector), or as specified |
| | by FAA. 122.850 may not be used for tests or exercises |
| Ground to Air SAR working channel | 157.175 83 A (21A, 23 A, 81A alternates as specified by local USCG |
| | Sector Commander) ** |
| Ground to Maritime SAR working channel | 157.050 21A (23A, 81A, 83A alternates as specified by local USCG |
| | Sector Commander) ** |
| Maritime/Air/Ground SAR working channel * | 157.175 83 A (21A, 23 A, 81 A alternates as specified by local USCG |
| | Sector Commander) ** |
| EMS / Medical Support | 155.3400 narrowband FM |
| Hailing* & DISTRESS only - Maritime/Air/Ground 156.800 VHF Marine channel 16 * | 156.800 VHF Marine channel 16 * |

Authority or appropriate license. VHF marine channels use wideband FM, emission 16K0F3E by local USCG Sector Commander. Non-maritime use of any VHF Marine channel requires FCC Special Temporary * Use VHF Marine ch.16 to make contact (30 seconds max.), then move to appropriate working channel as directed

Direction from USCG, FCC, or FAA overrides information in this table. This table does not convey authority to operate. ** VHF Marine channels: 16=156.800 21A=157.050 22A=157.100 23A=157.150 81A=157.075 82A=157.125 83A=157.1750

| VHF Incident Response (IR) Federal Interoperability Channels | sponse (IR) Fe | deral Interoper | ability Channe | ls |
|---|--------------------|---|-------------------------------|-------------------|
| Suggested Assignment (subject to availability & local plans) | Channel Name | Note | Mobile RX | Mobile TX |
| Incident Calling | NC 1 | Calling | 169.5375 | 164.7125 |
| Incident Command | IR 1 | | 170.0125 | 165.2500 |
| Medical Evacuation Control | IR 2 | | 170.4125 | 165.9625 |
| Logistics Control | IR3 | | 170.6875 | 166.5750 |
| Interagency Convoy | IR 4 | | 173.0375 | 167.3250 |
| Incident Calling (Direct) | IR 5 | Direct for NC 1 | 169.5375 | 169.5375 (S) |
| | | Calling | | |
| Incident Command (Direct) | IR 6 | Direct for IR 1 | 170.0125 | 170.0125 (S) |
| Medical Evacuation Control | IR7 | Direct for IR 2 | 170.4125 | 170.4125 (S) |
| Logistics Control (Direct) | IR 8 | Direct for IR 3 | 170.6875 | 170.6875 (S) |
| Interagency Convoy (Direct) | IR9 | Direct for IR 4 | 173.0375 | 173.0375 (S) |
| *See "Conditions for Use of Federal Interoperability Channels" on page 20 - page 22. Default operation should be carrier squelch receive, CTCSS 167.9/CSQ transmit. If the user can enable/disable CTCSS | eroperability Chan | nels" on page 20 - pag S 167.9/CSQ transmit. | e 22. If the user can enak | ble/disable CTCSS |
| without reprogramming the radio, the indicated C it. So tone also could be programmed for receive, and the user instructed how and when to enable/disable. | able/disable. | one also could be prog | rammed for receive, | , and the user |

All channels on this page are NARROWBAND only.

| HV | IF Law Enf | VHF Law Enforcement (LE) Federal Interoperability Channels | ederal Interope | erability Channo | els |
|---|------------------------------------|--|----------------------|--------------------|-----------------------------|
| Description | Channel Name | Note | Mobile RX (MHz) | Mobile TX (MHz) | CTCSS or NAC |
| Calling | LE A | Analog | 167.0875 | 167.0875 (S) | 167.9 Tx, CSQ Rx |
| Tactical | LE1 | Analog | 167.0875 | 162.0875 | 167.9 Tx, CSQ Rx |
| Tactical | LE 2 | | 167.2500 | 162.2625 | \$68F (1679 ₁₀) |
| Tactical | LE 3 | | 167.7500 | 162.8375 | \$68F (1679 ₁₀) |
| Tactical | LE 4 | | 168.1125 | 163.2875 | \$68F (1679 ₁₀) |
| Tactical | LE 5 | | 168.4625 | 163.4250 | \$68F (1679 ₁₀) |
| Tactical | LE 6 | Direct for LE 2 | 167.2500 | 167.2500 (S) | \$68F (1679 ₁₀) |
| Tactical | LE 7 | Direct for LE 3 | 167.7500 | 167.7500 (S) | \$68F (1679 ₁₀) |
| Tactical | LE 8 | Direct for LE 4 | 168.1125 | 168.1125 (S) | \$68F (1679 ₁₀) |
| Tactical | LE 9 | Direct for LE 5 | 168.4625 | 168.4625 (S) | \$68F (1679 ₁₀) |
| *See "Conditions for Use of Federal Interoperabilic CTCSS on receive only if user selectable; else CSQ. | r Use of Feder nly if user sele | *See "Conditions for Use of Federal Interoperability Channels" on page 20 - page 22. CTCSS on receive only if user selectable; else CSQ. | annels" on page 20 - | page 22. | |
| All channels on th | iis page are N | All channels on this page are NARROWBAND only. | | | |

| UHF Incident Response (IR) Federal Interoperability Channels | nse (IR) Fe | deral Interopera | bility Channe | is |
|---|-----------------|------------------|--------------------|--------------------|
| Suggested Assignment (subject to availability & local plans) | Channel Name | Note | Mobile RX (MHz) | Mobile TX (MHz) |
| Incident Calling | NC 2 | Calling | 410.2375 | 419.2375 |
| Ad hoc assignment | IR 10 | | 410.4375 | 419.4375 |
| Ad hoc assignment | IR 11 | | 410.6375 | 419.6375 |
| SAR Incident Command | IR 12 | | 410.8375 | 419.8375 |
| Ad hoc assignment | IR 13 | | 413.1875 | 413.1875 (S) |
| Interagency Convoy | IR 14 | | 413.2125 | 413.2125 (S) |
| Incident Calling (Direct) | IR 15 | Direct for NC 2 | 410.2375 | 410.2375 (S) |
| | | Calling | | |
| Ad hoc assignment (Direct) | IR 16 | Direct for IR 10 | 410.4375 | 410.4375 (S) |
| Ad hoc assignment (Direct) | IR 17 | Direct for IR 11 | 410.6375 | 410.6375 (S) |
| SAR Incident Command (Direct) | IR 18 | Direct for IR 12 | 410.8375 | 410.8375 (S) |
| *Conditions for Illoyd Fodors I between the Channels on many 20 | Lillit. Chann | | 3 | |

^{*}See "Conditions for Use of Federal Interoperability Channels" on page 20 - page 22.

Default operation should be carrier squelch receive, CTCSS 167.9/CSQ transmit. If the user can enable/disable CTCSS instructed how and when to enable/disable without reprogramming the radio, the indicated CTCSS tone also could be programmed for receive, and the user

| u . | JHF Law E | UHF Law Enforcement (LE) Federal Interoperability Channels | ederal Interop | erability Chan | nels |
|---|------------------------------------|--|----------------------|--------------------|-----------------------------|
| Description | Channel Name | Note | Mobile RX (MHz) | Mobile TX (MHz) | CTCSS or NAC |
| Calling | LEB | Analog | 414.0375 | 414.0375 (S) | 167.9 Tx, CSQ Rx |
| Tactical | LE 10 | Analog | 409.9875 | 418.9875 | 167.9Tx, CSQ Rx |
| Tactical | LE 11 | | 410.1875 | 419.1875 | \$68F (1679 ₁₀) |
| Tactical | LE 12 | | 410.6125 | 419.6125 | \$68F (1679 ₁₀) |
| Tactical | LE 13 | | 414.0625 | 414.0625 (S) | \$68F (1679 ₁₀) |
| Tactical | LE 14 | | 414.3125 | 414.3125 (S) | \$68F (1679 ₁₀) |
| Tactical | LE 15 | | 414.3375 | 414.3375 (S) | \$68F (1679 ₁₀) |
| Tactical | LE 16 | Direct for LE 10 Analog | 409.9875 | 409.9875 (S) | 167.9Tx, CSQ Rx |
| Tactical | LE 17 | Direct for LE 11 | 410.1875 | 410.1875 (S) | \$68F (1679 ₁₀) |
| Tactical | LE 18 | Direct for LE 12 | 410.6125 | 410.6125 (S) | \$68F (1679 ₁₀) |
| *See "Conditions for Use of Federal Interoperabil CTCSS on receive only if user selectable; else CSQ All channels on this name are NARROWRAND | or Use of Feda only if user sel | *See "Conditions for Use of Federal Interoperability Channels" on page 20 - page 22. CTCSS on receive only if user selectable; else CSQ. All channels on this page are NARROWRAND only | ınnels" on page 20 – | page 22. | |
| All channels on t | his page are | All channels on this page are NARROWBAND only. | | | |

| A or East of Line C. | Default operation should be carrier squelch receive, CTCSS 156.7(5A) transmit. If the user can enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone also could be programmed for receive, and the user instructed how and when to enable/disable. All channels on this page are NARROWBAND only. Limited to 3 watts ERP above Line A or East of Line C. | Default operation should be carrier squelch receive, CTCSS 156.7(5A) transmit. If the uenable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone als be programmed for receive, and the user instructed how and when to enable/disable All channels on this page are NARROWBAND only. Limited to 3 watts ERP about | Default operation should be considered in the critical without be programmed for receive, and All channels on this page at |
|----------------------|--|---|--|
| 453.8625 | 453.8625 | UTAC43D | Tactical |
| 458.8625 | 453.8625 | UTAC43 | Tactical |
| 453.7125 | 453.7125 | UTAC42D | Tactical |
| 458.7125 | 453.7125 | UTAC42 | Tactical |
| 453.4625 | 453.4625 | UTAC41D | Tactical |
| 458.4625 | 453.4625 | UTAC41 | Tactical |
| 453.2125 | 453.2125 | UCALL40D | Calling |
| 458.2125 | 453.2125 | UCALL40 | Calling |
| Mobile TX (MHz) | Mobile RX (MHz) | Channel Name | Description |
| Channels | Non-Federal UHF National Interoperability Repeater Channels | eral UHF National Inte | Non-Fed |

These frequencies are NOT covered by the blanket authorization for nationwide interoperability channels. A valid FCC license for these frequencies is required.

| Channel Name | Mobile RX (MHz) | Mobile TX (MHz) | Bandwidth |
|--------------|-----------------|-----------------|------------|
| MED-9* | 462.950 | 467.950 | 12.5, 6.25 |
| MED-91* | 462.95625 | 467.95625 | 6.25 |
| MED-92 * | 462.9625 | 467.9625 | 12.5, 6.25 |
| MED-93 * | 462.96875 | 467.96875 | 6.25 |
| MED-10* | 462.975 | 467.975 | 12.5, 6.25 |
| MED-101 * | 462.98125 | 467.98125 | 6.25 |
| MED-102 * | 462.9875 | 467.9875 | 12.5, 6.25 |
| MED-103 * | 462.99375 | 467.99375 | 6.25 |
| | | | |

^{*} Used primarily for dispatch; may be used for mutual aid. 47CFR90.20(d)(65).

Repeater mode: mobile transmits on "Mobile TX" freq., receives on "Base & Mobile TX" freq. CTCSS as Direct mode: receive & transmit on "Mobile RX" freq.; add "D" to channel name.

(continued)

required by local plan.

These frequencies are NOT covered by the blanket authorization for nationwide interoperability channels. A valid FCC license for these frequencies is required.

| Mobile RX (MHz) | Mobile TX (MHz) | Bandwidth |
|-----------------|--|------------------------|
| 463.000 | 468.000 | 12.5, 6.25 |
| 463.00625 | 468.00625 | 6.25 |
| 463.0125 | 468.0125 | 12.5, 6.25 |
| 463.01875 | 468.01875 | 6.25 |
| 463.025 | 468.025 | 12.5, 6.25 |
| 463.03125 | 468.03125 | 6.25 |
| 463.0375 | 468.0375 | 12.5, 6.25 |
| 463.04375 | 468.04375 | 6.25 |
| | Mobile RX (MHz) 463.000 463.00625 463.0125 463.01875 463.025 463.03125 463.0375 | RX (MHz) 25 5 75 75 25 |

Direct mode: receive & transmit on "Mobile RX" freq.; add "D" to channel name.

Repeater mode: mobile transmits on "Mobile TX" freq., receives on "Base & Mobile TX" freq. CTCSS as required by local plan.

These frequencies are NOT covered by the blanket authorization for nationwide interoperability channels. A valid FCC license for these frequencies is required.

| MED-43 463.09375 468.09 | MED-42 463.0875 468.08 | MED-41 463.08125 468.08 | MED-4 463.075 468.07 | MED-33 463.06875 468.06 | MED-32 463.0625 468.06 | MED-31 463.05625 468.05 | MED-3 463.050 468.05 | Channel Name Mobile KX (MHz) Mobile |
|-----------------------------|------------------------|-------------------------|----------------------|-------------------------|------------------------|-------------------------|----------------------|---|
| 468.09375 6.25 | 468.0875 12.5, 6.25 | 468.08125 6.25 | 468.075 12.5, 6.25 | 468.06875 6.25 | 468.0625 12.5, 6.25 | 468.05625 6.25 | 468.050 12.5, 6.25 | Mobile IX (MHz) Bandwidth |

Direct mode: receive & transmit on "Mobile RX" freq.; add "D" to channel name.

required by local plan. Repeater mode: mobile transmits on "Mobile TX" freq., receives on "Base & Mobile TX" freq. CTCSS as

These frequencies are NOT covered by the blanket authorization for nationwide interoperability channels. A valid FCC license for these frequencies is required.

| MED-63 | MED-62 | MED-61 | MED-6 | MED-53 | MED-52 | MED-51 | MED-5 | Channel Name |
|-----------|------------|-----------|------------|-----------|------------|-----------|------------|-----------------|
| 463.14375 | 463.1375 | 463.13125 | 463.125 | 463.11875 | 463.1125 | 463.10625 | 463.100 | Mobile RX (MHz) |
| 468.14375 | 468.1375 | 468.13125 | 468.125 | 468.11875 | 468.1125 | 468.10625 | 468.100 | Mobile TX (MHz) |
| 6.25 | 12.5, 6.25 | 6.25 | 12.5, 6.25 | 6.25 | 12.5, 6.25 | 6.25 | 12.5, 6.25 | Bandwidth |

Direct mode: receive & transmit on "Mobile RX" freq.; add "D" to channel name.

required by local plan. Repeater mode: mobile transmits on "Mobile TX" freq., receives on "Base & Mobile TX" freq. CTCSS as

These frequencies are NOT covered by the blanket authorization for nationwide interoperability channels. A valid FCC license for these frequencies is required.

| 468.17 | | | | |
|---------|--------------------|----|----|---|
| 468.175 | | 25 | 25 | 463.18125 468.18125 463.1875 468.1875 463.19375 468.19375 |
| | 468.175 12.5, 6.25 | | | |

Direct mode: receive & transmit on "Mobile RX" freq.; add "D" to channel name.

required by local plan. Repeater mode: mobile transmits on "Mobile TX" freq., receives on "Base & Mobile TX" freq. CTCSS as

| 70 | 0 MHz Nationwide In | 700 MHz Nationwide Interoperability Channels | els |
|--|---------------------|--|--------------------------------|
| Mode: P25 FDMA Common Air Interface | n Air Interface | Message ID: \$0000000000000000000000 (0 ₁₀) |)0000000000 (0 ₁₀) |
| NAC: \$293 (659 ₁₀) | | No encryption on calling channels: | hannels: |
| Talk Group ID: \$00001 (1 ₁₀) Manufacturer's ID: \$00 (0 ₁₀) | | Algorithm ID: \$80 (128₁₀) Key ID: \$0000 (0₁₀) | 0) |
| Primary Use | Channel Name | Mobile RX (MHz) | Mobile TX (MHz) |
| General Public Safety | 7TAC51 | 769.14375 | 799.14375 |
| General Public Safety | 7TAC51D | 769.14375 | 769.14375 |
| Calling Channel | 7CALL50 | 769.24375 | 799.24375 |
| Calling Channel | 7CALL50D | 769.24375 | 769.24375 |
| EMS | 7MED65 | 769.39375 | 799.39375 |
| EMS | 7MED65D | 769.39375 | 769.39375 |
| EMS | 7MED66 | 769.49375 | 799.49375 |
| EMS | 7MED66D | 769.49375 | 769.49375 |
| General Public Safety | 7TAC52 | 769.64375 | 799.64375 |
| General Public Safety | 7TAC52D | 769.64375 | 769.64375 |

| 70 | 0 MHz Nationwide In | 700 MHz Nationwide Interoperability Channels | sls |
|-----------------------|---------------------|--|-----------------|
| Primary Use | Channel Name | Mobile RX (MHz) | Mobile TX (MHz) |
| General Public Safety | 7TAC55 | 769.74375 | 799.74375 |
| General Public Safety | 7TAC55D | 769.74375 | 769.74375 |
| Fire | 7FIRE63 | 769.89375 | 799.89375 |
| Fire | 7FIRE63D | 769.89375 | 769.89375 |
| Fire | 7FIRE64 | 769.99375 | 799.99375 |
| Fire | 7FIRE64D | 769.99375 | 769.99375 |
| General Public Safety | 7TAC53 | 770.14375 | 800.14375 |
| General Public Safety | 7TAC53D | 770.14375 | 770.14375 |
| General Public Safety | 7TAC56 | 770.24375 | 800.24375 |
| General Public Safety | 7TAC56D | 770.24375 | 770.24375 |
| Law Enforcement | 7LAW61 | 770.39375 | 800.39375 |
| Law Enforcement | 7LAW61D | 770.39375 | 770.39375 |

| 700 | 0 MHz Nationwide Int | 700 MHz Nationwide Interoperability Channels | S |
|-----------------------|----------------------|--|--------------------|
| Primary Use | Channel Name | Mobile RX (MHz) | Mobile TX (MHz) |
| Law Enforcement | 7LAW62 | 770.49375 | 800.49375 |
| Law Enforcement | 7LAW62D | 770.49375 | 770.49375 |
| General Public Safety | 7TAC54 | 770.64375 | 800.64375 |
| General Public Safety | 7TAC54D | 770.64375 | 770.64375 |
| Mobile Data | 7DATA69 | 770.74375 | 800.74375 |
| Mobile Data | 7DATA69D | 770.74375 | 770.74375 |
| Mobile Repeater | 7M0B59 | 770.89375 | 800.89375 |
| Mobile Repeater | 7M0B59D | 770.89375 | 770.89375 |
| Other Public Service | 7GTAC57 | 770.99375 | 800.99375 |
| Other Public Service | 7GTAC57D | 770.99375 | 770.99375 |
| EMS | 7MED86 | 773.00625 | 803.00625 |
| EMS | 7MED86D | 773.00625 | 773.00625 |

| 70 | 0 MHz Nationwide In | 700 MHz Nationwide Interoperability Channels | sls |
|-----------------------|---------------------|--|-----------------|
| Primary Use | Channel Name | Mobile RX (MHz) | Mobile TX (MHz) |
| General Public Safety | 7TAC71 | 773.10625 | 803.10625 |
| General Public Safety | 7TAC71D | 773.10625 | 773.10625 |
| Calling Channel | 7CALL70 | 773.25625 | 803.25625 |
| Calling Channel | 7CALL70D | 773.25625 | 773.25625 |
| EMS | 7MED87 | 773.35625 | 803.35625 |
| EMS | 7MED87D | 773.35625 | 773.35625 |
| Fire | 7FIRE83 | 773.50625 | 803.50625 |
| Fire | 7FIRE83D | 773.50625 | 773.50625 |
| General Public Safety | 7TAC72 | 773.60625 | 803.60625 |
| General Public Safety | 7TAC72D | 773.60625 | 773.60625 |
| General Public Safety | 7TAC75 | 773.75625 | 803.75625 |
| General Public Safety | 7TAC75D | 773.75625 | 773.75625 |

| 70 | 0 MHz Nationwide In | 700 MHz Nationwide Interoperability Channels | sls |
|-----------------------|---------------------|--|--------------------|
| Primary Use | Channel Name | Mobile RX (MHz) | Mobile TX (MHz) |
| Fire | 7FIRE84 | 773.85625 | 803.85625 |
| Fire | 7FIRE84D | 773.85625 | 773.85625 |
| Law Enforcement | 7LAW81 | 774.00625 | 804.00625 |
| Law Enforcement | 7LAW81D | 774.00625 | 774.00625 |
| General Public Safety | 7TAC73 | 774.10625 | 804.10625 |
| General Public Safety | 7TAC73D | 774.10625 | 774.10625 |
| General Public Safety | 7TAC76 | 774.25625 | 804.25625 |
| General Public Safety | 7TAC76D | 774.25625 | 774.25625 |
| Law Enforcement | 7LAW82 | 774.35625 | 804.35625 |
| Law Enforcement | 7LAW82D | 774.35625 | 774.35625 |
| Mobile Repeater | 7M0B79 | 774.50625 | 804.50625 |
| Mobile Repeater | 7M0B79D | 774.50625 | 774.50625 |

| | | | Other Public Service | Other Public Service | Mobile Data | Mobile Data | General Public Safety | General Public Safety | Primary Use | 70 |
|--|--|--|----------------------|----------------------|-------------|-------------|-----------------------|-----------------------|--------------------|--|
| | | | 7GTAC77D | 7GTAC77 | 7DATA89D | 7DATA89 | 7TAC74D | 7TAC74 | Channel Name | 0 MHz Nationwide In |
| | | | 774.85625 | 774.85625 | 774.75625 | 774.75625 | 774.60625 | 774.60625 | Mobile RX (MHz) | 700 MHz Nationwide Interoperability Channels |
| | | | 774.85625 | 804.85625 | 774.75625 | 804.75625 | 774.60625 | 804.60625 | Mobile TX (MHz) | els |

| Non-I | Federal 800 M | Non-Federal 800 MHz National Mutual Aid Repeater Channels | ter Channels |
|---|--|---|----------------------------------|
| Description | Ch. Name | Mobile RX (MHz)* | Mobile TX (MHz)* |
| Calling | 8CALL90 | 851.0125 (866.0125) | 806.0125 (821.0125) |
| Calling — Direct | 8CALL90D | 851.0125 (866.0125) | 851.0125 (866.0125) |
| Tactical | 8TAC91 | 851.5125 (866.5125) | 806.5125 (821.5125) |
| Tactical — Direct | 8TAC91D | 851.5125 (866.5125) | 851.5125 (866.5125) |
| Tactical | 8TAC92 | 852.0125 (867.0125) | 807.0125 (822.0125) |
| Tactical — Direct | 8TAC92D | 852.0125 (867.0125) | 852.0125 (867.0125) |
| Tactical | 8TAC93 | 852.5125 (867.5125) | 807.5125 (822.5125) |
| Tactical — Direct | 8TAC93D | 852.5125 (867.5125) | 852.5125 (867.5125) |
| Tactical | 8TAC94 | 853.0125 (868.0125) | 808.0125 (823.0125) |
| Tactical — Direct | 8TAC94D | 853.0125 (868.0125) | 853.0125 (868.0125) |
| Default operation shou enable/disable CTCSS v be programmed for rec | lld be carrier squelowithout reprogram ceive, and the user | Default operation should be carrier squelch receive, CTCSS 156.7(5A) transmit. If the user can enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone could also be programmed for receive, and the user instructed how and when to enable/disable. | e user can could also ble. |
| *The frequency in pare were ICALL, ITAC1 - ITA | enthesis, which is 1 C4. Wideband FM 2 | *The frequency in parenthesis, which is 15 MHz higher, is the frequency used before rebanding - channel names were ICALL, ITAC1 - ITAC4. Wideband FM 20K0F3E before and after rebanding. | e rebanding - channel names |

25 Cities Project Federal Interoperability Channels

agencies interested in using these frequencies, who are not currently participating in the 25 Cities effort, "25 Cities" project to support local, state, federal, and tribal voice communications interoperability. Each or other questions regarding the project, contact: should contact the local FBI Radio Manager prior to programming any equipment. Please note that three Cities VHF channels are accessible by non-VHF users via permanent or ad hoc patching capabilities. All metropolitan area has agreed upon policies and procedures regarding use of these channels. Most 25 The 25 Cities Project Federal Interoperability Channels were developed through the Department of Justice (BAFIOLE3), Boston (BS IO LE4), and Washington DC (DCIO2LE2). For frequencies and programming details <u> 25 Cities channels are on VHF Law Enforcement (LE) Federal Interoperability Channel pairs: Baltimore</u>

Quintin R. Wyckoff, FBI FED-IO Program Manager 703-985-1467 Quintin. Wyckoff@ic.fbi.gov

Information as of December 30, 2013.

| BS IO LE4 (VHF P25 Voted System) | BOSTON |
|-------------------------------------|-----------|
| BPD FIO (VHF Voted System - Analog) | BOSTON |
| BAFIOLE3 (VHF P25 Voted System) | BALTIMORE |
| ATL FIO (VHF P25 Voted System) | ATLANTA |
| CHANNEL NAME | CITY |

25 Cities Project Federal Interoperability Channels - continued

| CITY | CHANNEL NAME |
|----------|--|
| CHICAG0 | CG-COM-N, CG-COM-C, CG-COM-S (VHF P25 Multicast Voted System) |
| CHICAG0 | CG-TAC-N, CG-TAC-C, CG-TAC-S (VHF P25 Multicast Voted System) |
| DALLAS | DFW EAST (VHF P25 Voted System) |
| DALLAS | DFW WEST (VHF P25 Voted System) |
| DENVER | DEN 10-N, DEN 10-E, DEN 10-C, DEN 10-S, DEN 10-W (VHF P25 Multicast Voted System) |
| EL PASO | EP FIO-W, EP FIO-E (VHF P25 Multicast Voted System) |
| HARTFORD | CFedcom-N, CFedcom-S, CFedcom-E (VHF P25 Multicast Voted System) |

25 Cities Project Federal Interoperability Channels - continued

| (VHF F25 Multicast voted System) | STRAUL |
|--|---------------|
| FEDCOM-MP, FEDCOM-SP | MINNEAPOLIS / |
| MIA FIO (VHF P25 Voted System) | MIAMI |
| LA FIO3 (VHF P25 Voted System) | LOS ANGELES |
| LA FIO2 (VHF P25 Voted System) | LOS ANGELES |
| LA FIO1 (VHF P25 Voted System) | LOS ANGELES |
| JAX FIO (VHF P25 Voted System) | JACKSONVILLE |
| HOU PAT (VHF P25 Voted System) | HOUSTON |
| HOU CMD (VHFP25 Voted System) | HOUSTON |
| HNL FIRE (VHFVoted System — Analog) | HONOLULU |
| LE 4 (VHF P25 Transportable 125 watt repeater) | HONOLULU |
| HNL FIO2 (VHF P25 Stand Alone 125 watt repeater) | HONOLULU |
| HNL FIO (VHF P25 Stand Alone 125 watt repeater) | HONOLULU |
| CHANNEL NAME | CITY |

25 Cities Project Federal Interoperability Channels - continued

| CITY | CHANNEL NAME |
|----------------------------|--|
| NATIONWIDE | J-SMART (Talkgroup # 15) (LightSquared MSAT Radio PTT) |
| NEW ORLEANS | NOLA FIO (VHF P25 Voted System) |
| NEWYORK | NYC FIO (NYC), NYC FIO-N (Orange-Putnam), NYC FIO-E (Suffolk), NYC FIO-S (Central NJ) (VHF P25 Multicast Voted system) |
| NEW YORK | NYC FIO2 (VHF P25 Voted System) |
| NEWARK NJ | NK FIO (Northern New Jersey) (VHF P25 Voted System) |
| NORFOLK / HAMPTON ROADS | HRN FIO (VHF P25 Voted System) |
| ORLANDO | ORL FIO (VHF P25 Voted System) |
| PHILADELPHIA | PH FIO (VHF P25 Voted System) |
| SAN DIEGO | CALAW1, VLAW31, 800 FIREMARS, 800 CLEMARS (VHF Voted System with Transmitter Selected by RCS Dispatch - Analog) |

25 Cities Project Federal Interoperability Channels - continued

| CEEED ED CEEED EC CEEED ET CEEED EW (VIUE DOS Minitions Victor) | CANIEDANICISCO |
|---|----------------|
| All of the above repeaters can be networked together. | SAN FRANCISCO |
| SF FED-U (UHF P25 Stand Alone 125 watt repeater) | SAN FRANCISCO |
| SF FED-V (VHF P25 Stand Alone 125 watt repeater) | SAN FRANCISCO |
| 8TAC94 (800 MHz Stand Alone 125 watt repeater- Analog) | SAN FRANCISCO |
| SF MA T-A (UHF-T Band Stand Alone 125 watt repeater - Analog) | SAN FRANCISCO |
| CLEMARS 7 (LLAW1) (Low Band repeater) | SAN FRANCISCO |
| SF MA V-A(VHF Stand Alone 125 watt repeater - Analog) | SAN FRANCISCO |
| SF MA U-A (UHF Stand Alone 125 watt repeater - Analog) | SAN FRANCISCO |
| All of the above repeaters can be networked together. | ST LOUIS |
| 8TAC91 (800 MHz Simulcast Voted Repeater System) | ST LOUIS |
| STL TAC (VHF P25 Voted System) | ST LOUIS |
| 8CALL90(800 MHz Simulcast Voted Repeater System) | ST LOUIS |
| STL CALL (VHF P25 Voted System) | SI LOUIS |
| CHANNEL NAME | CITY |
| | |

25 Cities Project Federal Interoperability Channels - continued

| DCIO2LE2 (VHF P25 Voted System) | WASHINGTON DC |
|---------------------------------|---------------|
| DC IO-1 (VHF P25 Voted System) | WASHINGTON DC |
| TAM FIO(VHF P25 Voted System) | TAMPA |
| CHANNEL NAME | CITY |
| | |

Operations Center Telephone Numbers

| | operations center rereptions numbers |
|------|--|
| SHG | Main Number202-282-8000 |
| | NOC Senior Watch Officer202-282-8101 |
| | NCC Watch703-235-5080 |
| | SHARES HF Radio703-235-5080 |
| FC | Federal Communications Commission |
| | FCC Operations Center (FCCOC) FCCOPS@fcc.gov202-418-1122, -2813 FAX |
| | General info (1-888-CALL-FCC)1-888-225-5322 |
| FEMA | Federal Emergency Management Agency |
| | National Watch Center |
| | National Response Coordination Center (NRCC)202-212-2424 |
| | NRCC emailFEMA-NRCC@fema.dhs.gov |
| FPS | Federal Protective Service, National Emergency Number |
| ARC | American National Red Cross, 24-hr Disaster Operations Center 800-526-3571, 202-303-5555 |
| ARRL | |
| | Emergency Preparedness Manager860-594-0222 |
| | Radio Station W1AW 860-594-0268 |
| | |

Emergency Support Functions (ESF)

| during activations 202-212-2424 | Services |
|-------------------------------------|--------------------------------------|
| Telephone number for all ESFs | ESF #8: Public Health and Medical |
| ESF #15: External Affairs | ESF #7: Resource Support |
| Recovery | Human Services |
| ESF #14: Long-Term Community | ESF #6: Mass Care, Housing, and |
| ESF #13: Public Safety and Security | ESF #5: Emergency Management |
| ESF #12: Energy | ESF #4: Firefighting |
| Resources | 9 |
| ESF #11: Agriculture and Natural | ESF #3: Public Works and Engineering |
| Response | |
| ESF #10: Oil & Hazardous Materials | ESF #2: Communications |
| ESF #9: Urban Search & Rescue | ESF #1: Transportation |

FEMA Regions - States and Territories

Region I: CT, MA, ME, NH, RI, VT - 1-617-956-7506 or 1-877-336-2734

Region II: NJ, NY, Puerto Rico and the US Virgin Islands NJ and NY: 1-212-680-3600

PR and USVI: 1-787-296-3500

Region III: DC, DE, MD, PA, VA, WV - 1-215-931-5500

Region IV: AL, FL, GA, KY, MS, NC, SC, TN - 1-770-220-5200

Region V: IL, IN, MI, MN, OH, WI - 1-312-408-5500

Region VI: AR, LA, NM, OK, TX - 1-940-898-5399

Region VII: IA, KS, MO, NE - 1-816-283-7061

Region VIII: CO, MT, ND, SD, UT, WY - 1-303-235-4800

Region IX: AZ, CA, Guam (GU), HI, NV, CNMI, RMI, FSM, American Samoa (AS) 1-510-627-7100

Region X: AK, ID, OR, WA - 1-425-487-4600

FEMA Headquarters, Washington DC: 1-202-646-2500

FEMA Disaster Assistance: 1-800-621-FEMA (3362)

U.S. Coast Guard Rescue Coordination Centers

24 hour Regional Contacts for Emergencies

Last Modified 12/4/2013

| RCC | Location | Phone Number |
|----------------------------------|-----------------|----------------|
| Atlantic Area SAR Coordinator | Portsmouth, VA | (757)398-6700 |
| RCC Boston | Boston, MA | (617)223-8555 |
| RCC Norfolk | Portsmouth, VA | (757)398-6231 |
| RCC Miami | Miami, FL | (305)415-6800 |
| RSC San Juan | San Juan, PR | (787)289-2042 |
| RCC New Orleans | New Orleans, LA | (504)589-6225 |
| RCC Cleveland | Cleveland, OH | (216)902-6117 |
| Pacific SAR Coordinator | Alameda, CA | (510)437-3700 |
| RCC Alameda | Alameda, CA | (510)437-3700 |
| RCC Seattle | Seattle, WA | (206)220-7001 |
| RCC Honolulu | Honolulu, HI | (808) 535-3333 |
| Sector Guam | Santa Rita, GU | (671)355-4824 |
| RCC Juneau | Juneau, Alaska | (907)463-2000 |

CTCSS Tones and Codes

| Freq. (<u>Hz)</u> | Motorola <u>Code</u> | NIFC & <u>CA Fire *</u> | Freq. (<u>Hz)</u> | Motorola <u>Code</u> | NIFC & <u>CA Fire *</u> |
|-----------------------|-------------------------|-------------------------|-----------------------|-------------------------|-------------------------|
| 67.0 | XZ | 17 | 136.5 | 4Z | 4 |
| 69.3** | WZ | | 141.3 | 4A | 13 |
| 71.9 | XA | 18 | 146.2 | 4B | 5 |
| 74.4 | WA | 19 | 151.4 | 5Z | 14 |
| 77.0 | XB | 20 | 156.7 | 5A | 6 |
| 79.7 | WB | 21 | 162.2 | 5B | 15 |
| 82.5 | YZ | 22 | 167.9 | 6Z | 7 |
| 85.4 | YA | 23 | 173.8 | 6A | 29 |
| 88.5 | YB | 24 | 179.9 | 6B | 30 |
| 91.5 | ZZ | 25 | 186.2 | 7Z | 31 |
| 94.8 | ZA | 26 | 192.8 | 7A | 16 |
| 97.4 | ZB | 27 | 203.5 | M1 | 32F |
| 100.0 | 1Z | 9 | 206.5 | 8Z | |
| 103.5 | 1A | 8 | 210.7 | M2 | |
| 107.2 | 1B | 10 | 218.1 | M3 | |
| 110.9 | 2Z | 1 | 225.7 | M4 | |
| 114.8 | 2A | 11 | 229.1 | 9Z | |
| 118.8 | 2B | 28 | 233.6 | M5 | |
| 123.0 | 3Z | 2 | 241.8 | M6 | |
| 127.3 | 3A | 12 | 250.3 | M7 | |
| 131.8 | 3B | 3 | 254.1 | 0Z | |

^{*} California FIRESCOPE tone list, used by NIFC and CA fire agencies Ref. http://www.firescope.org/macs-docs/MACS-441-1.pdf

^{** 69.4} in some radios

| DCS Codes | | | | | | | |
|-----------|----------|------|------|------|------|------|------|
| Normal | Inverted | Nor. | Inv. | Nor. | Inv. | Nor. | Inv. |
| 023 | 047 | 155 | 731 | 325 | 526 | 516 | 432 |
| 025 | 244 | 156 | 265 | 331 | 465 | 523 | 246 |
| 026 | 464 | 162 | 503 | 332 | 455 | 526 | 325 |
| 031 | 627 | 165 | 251 | 343 | 532 | 532 | 343 |
| 036 | 172 | 172 | 036 | 346 | 612 | 546 | 132 |
| 043 | 445 | 174 | 074 | 351 | 243 | 565 | 703 |
| 047 | 023 | 205 | 263 | 364 | 131 | 606 | 631 |
| 051 | 032 | 212 | 356 | 365 | 125 | 612 | 346 |
| 053 | 452 | 223 | 134 | 371 | 734 | 624 | 632 |
| 054 | 413 | 225 | 122 | 411 | 226 | 627 | 031 |
| 065 | 271 | 226 | 411 | 412 | 143 | 631 | 606 |
| 071 | 306 | 243 | 351 | 413 | 054 | 632 | 624 |
| 072 | 245 | 244 | 025 | 423 | 315 | 654 | 743 |
| 073 | 506 | 245 | 072 | 431 | 723 | 662 | 466 |
| 074 | 174 | 246 | 523 | 432 | 516 | 664 | 311 |
| 114 | 712 | 251 | 165 | 445 | 043 | 703 | 565 |
| 115 | 152 | 252 | 462 | 446 | 255 | 712 | 114 |
| 116 | 754 | 255 | 446 | 452 | 053 | 723 | 431 |
| 122 | 225 | 261 | 732 | 454 | 266 | 731 | 155 |
| 125 | 365 | 263 | 205 | 455 | 332 | 732 | 261 |
| 131 | 364 | 265 | 156 | 462 | 252 | 734 | 371 |
| 132 | 546 | 266 | 454 | 464 | 026 | 743 | 654 |
| 134 | 223 | 271 | 065 | 465 | 331 | 754 | 116 |
| 143 | 412 | 274 | 145 | 466 | 662 | | |
| 145 | 274 | 306 | 071 | 503 | 162 | | |
| 152 | 115 | 311 | 664 | 506 | 073 | | |
| 032 | 051 | 315 | 423 | | | | |


| P25 Digital Codes | | | | | | |
|----------------------------|--|--|---|--|--|--|
| | | P25 Digital Co | aes | | | |
| NAC – Network Access Codes | | | | | | |
| \$293 | 659 ₁₀ | default NAC | | | | |
| \$F7E | 3966 ₁₀ | receiver will unsquelch | with any incoming NAC | | | |
| \$F7F | 3967 ₁₀ | a repeater with this NAO repeated with the NAO | C will allow incoming signals to be C intact | | | |
| TGID - | Talkgroup ID | | | | | |
| \$0001 | 1,0 | default | | | | |
| \$0000 | 0,10 | no-one, talkgroup with | no users — used for individual call | | | |
| \$FFFF | 65535 ₁₀ | a repeater with this NAO repeated with the NAO | C will allow incoming signals to be C intact | | | |
| Unit ID | | | | | | |
| \$00000 | 0 | 0,0 | default | | | |
| \$00000 | 1-\$98767F | 1 ₁₀ - 9991807 ₁₀ no-one, talkgroup with no users — used for individual call | | | | |
| \$98968 | \$989680-\$FFFFFE 10000000 ₁₀ a repeater with this NAC will allow | | | | | |
| | | - 16777214 ₁₀ | incoming signals to be repeated with the NAC intact | | | |
| \$FFFFFI | F | 16777215 ₁₀ | designates everyone – used | | | |
| | | | when implementing a group call with a TGID3 | | | |

Note: Project 25 System Administrators should be aware of possible Unit ID conflicts when conducting operations with neighboring jurisdictions. System administrators should coordinate Unit IDs with agencies likely to operate on their system(s) to address any radio Unit ID conflicts.

[&]quot;\$" indicates hexidecimal values, "10" subscript indicates decimal value.

RS-232 Connectors (DB25 and DE9)

"Front" refers to the ends with the pins; "rear" refers to the end with the cable. The following is a view of the pins, looking at the front of the female connector (rear of male):

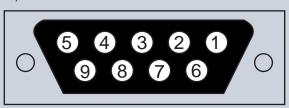


same for DB25, except top pins 13 - 1, bottom 25 - 14 (left to right)

| DE9 | <u>DB25</u> | Signal | | |
|---|----------------------|---|--|--|
| 1 | 8 | Carrier Detect | | |
| 2 | 3 | Receive Data | | |
| 3 | 2 | Transmit Data* | | |
| 4 | 20 | Data Terminal Ready* | | |
| 5 | 1,7 | Ground ** | | |
| 6 | 6 | Data Set Ready | | |
| 7 | 7 4 Request to Send* | | | |
| 8 | 8 5 Clear to Send | | | |
| 9 | 22 | Ring Indicator | | |
| * An output from the computer to the outside world. | | | | |
| ** On the DB | 25, 1 is the pro | tective ground, 7 is the signal ground. | | |

| RJ-45 Wiring | | | | | |
|--------------|------|---------------|-----------|--------------|-----------|
| | | T568A (less o | common) | T568B (mor | e common) |
| Pin | Pair | Color | Name | Color | Name |
| 1 | 2 | white/ green | RecvData+ | white/orange | TxData + |
| 2 | 2 | green | RecvData- | orange | TxData - |
| 3 | 3 | white/orange | TxData + | white/green | RecvData+ |
| 4 | 1 | blue | | blue | |
| 5 | 1 | white/blue | | white/blue | |
| 6 | 3 | orange | TxData - | green | RecvData- |
| 7 | 4 | white/brown | | white/brown | |
| 8 | 4 | brown | | brown | |

Note that the odd pin numbers are always the white-with-stripe color.

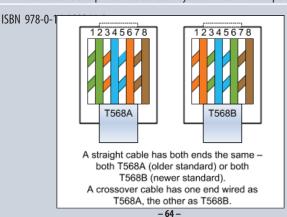

IP Addresses - Private Networks

These IP address ranges may be used in private networks. They may not be routed to the public internet.

| IPv4 Address Range | Number of Addresses | Subnet Mask |
|-------------------------------|---------------------|-------------|
| 10.0.0.0 - 10.255.255.255 | 16,777,216 | 255.0.0.0 |
| 172.16.0.0 - 172.31.255.255 | 1,048,576 | 255.240.0.0 |
| 192.168.0.0 - 192.168.255.255 | 65,536 | 255.255.0.0 |

IPv6 address block fc00::/7 is reserved for Unique Local Addresses

Telephone Block Wiring

| Pair Tip/Ring | Base /Stripe | Color | 66/110 Block | 50 Pin RJ-21 |
|---------------|--------------|-------|--------------|--------------|
| 1T | W/BL | | 1 | 26 |
| 1R | BL/W | | 2 | 1 |
| 2T | W/0 | | 3 | 27 |
| 2R | 0/W | | 4 | 2 |
| 3T | W/G | | 5 | 28 |
| 3R | G/W | | 6 | 3 |
| 4T | W/BR | | 7 | 29 |
| 4R | BR/W | | 8 | 4 |
| 5T | W/S | | 9 | 30 |
| 5R | S/W | | 10 | 5 |
| 6T | R/BL | | 11 | 31 |
| 6R | BL/R | | 12 | 6 |
| 7T | R/0 | | 13 | 32 |
| 7R | 0/R | | 14 | 7 |
| 8T | R/G | | 15 | 33 |
| 8R | G/R | | 16 | 8 |
| 9T | R/BR | | 17 | 34 |
| 9R | BR/R | | 18 | 9 |
| 10T | R/S | | 19 | 35 |
| 10R | S/R | | 20 | 10 |
| 11T | BK/BL | | 21 | 36 |
| 11R | BL/BK | | 22 | 11 |
| 12T | BK/O | | 23 | 37 |
| 12R | O/BK | | 24 | 12 |

Base colors: W-white, R-red, BK-black, Y-yellow, V-violet Stripe colors: BL-blue, O-orange, G-green, BR-brown, S-slate

Telephone Block Wiring - continued

| Pair Tip/Ring | Base /Stripe | Color | 66/110 Block | 50 Pin RJ-21 |
|---------------|--------------|-------|--------------|--------------|
| 13T | BK/G | | 25 | 38 |
| 13R | G/BK | | 26 | 13 |
| 14T | BK/BR | | 27 | 39 |
| 14R | BR/BK | | 28 | 14 |
| 15T | BK/S | | 29 | 40 |
| 15R | S/BK | | 30 | 15 |
| 16T | Y/BL | | 31 | 41 |
| 16R | BL/Y | | 32 | 16 |
| 17T | Y/0 | | 33 | 42 |
| 17R | 0/Y | | 34 | 17 |
| 18T | Y/G | | 35 | 43 |
| 18R | G/Y | | 36 | 18 |
| 19T | Y/BR | | 37 | 44 |
| 19R | BR/Y | | 38 | 19 |
| 20T | Y/S | | 39 | 45 |
| 20R | S/Y | | 40 | 20 |
| 21T | V/BL | | 41 | 46 |
| 21R | BL/V | | 42 | 21 |
| 22T | V/0 | | 43 | 47 |
| 22R | 0/V | | 44 | 22 |
| 23T | V/G | | 45 | 48 |
| 23R | G/V | | 46 | 23 |
| 24T | V/BR | | 47 | 49 |
| 24R | BR/V | | 48 | 24 |
| 25T | V/S | | 49 | 50 |
| 25R | S/V | | 50 | 25 |

Base colors: W-white, R-red, BK-black, Y-yellow, V-violet Stripe colors: BL-blue, O-orange, G-green, BR-brown, S-slate -67-

Telephone Connectors

Pin numbers are from left to right, holding the plug with the contacts up and looking at the side that does not have the spring clip.

"T" and "R" indicate "Tip" and "Ring".

| I and it materice tip and ting. | | | |
|---------------------------------|------|------|------|
| Pin | RJ25 | RJ14 | RJ11 |
| 1 | T3 | | |
| 2 | T2 | T2 | |
| 3 | R1 | R1 | R1 |
| 4 | T1 | T1 | T1 |
| 5 | R2 | R2 | |
| 6 | R3 | | |

| Circuit | Twisted-Pair Colors | 25-Pair Colors | Solid Colors |
|---------|---------------------|----------------|--------------|
| T1 | White/Blue | White/Blue | Green |
| R1 | Blue | Blue/White | Red |
| T2 | White/Orange | White/Orange | Black |
| R2 | Orange | Orange/White | Yellow |
| T3 | White/Green | White/Green | White |
| R3 | Green | Green/White | Blue |
| T4 | White/Brown | White/Brown | Orange |
| R4 | Brown | Brown/White | Brown |

Telephone Keypad Letters

| * ** | | | | |
|----------|-------|----------|--|--|
| 1:(QZ) | 2:ABC | 3:DEF | | |
| 4:GHI | 5:JKL | 6:MNO | | |
| 7:P(Q)RS | 8:TUV | 9:WXY(Z) | | |
| * | 0 | # | | |

| N11 Numbers | | |
|-------------|--|--|
| 2-1-1 | community information and referral services | |
| 3-1-1 | non-emergency police and other government services | |
| 4-1-1 | directory assistance | |
| 5-1-1 | traffic and transportation information | |
| 6-1-1 | repair service | |
| 7-1-1 | Telecommunications Relay Services | |
| 8-1-1 | local exchanged carriers business offices | |
| 9-1-1 | emergency services | |

DSN Area Codes

Defense Switched Network - Global Operator — 1-719-567-1110 (DSN 312-560-1110)

312 - CONUS 313 - Caribbean 314 - Europe 315 - Pacific

314 - Europe315 - Pacific317 - Alaska318 - Southwest Asia

319 - Canada

DSN Directory - Global http://www.disa.mil/dsn/directory/global.html

Cellular Telephone Emergency Response

Some cellular telephone companies have transportable cell sites (Cellular On Wheels – COWs, Cellular on Light Trucks – COLTs, etc.) that can be deployed during disasters, emergencies, and special events. Local jurisdictions are encouraged to coordinate with their established service provider representatives for local events; however, the U.S. Department of Homeland Security – National Coordinating Center for Telecommunications will assist jurisdictions with referrals to corporate level contacts for wireless/wireline service provider representatives if needed.

The NCC Watch can be reached 24x7 at 1-703-235-5080 or e-mail NCC@hq.dhs.gov

Satellite Phone Dialing Instructions

Iridium PIN (default) is 1111

(enter when powering-on the Iridium Subscriber Unit)

From a US Landline

Two-Stage Dialing: 1-480-768-2500, at prompt 12-digit Iridium number

To an Iridium phone directly as an International Call

011 + 8816xxxxxxx (Iridium Phone Number)

To an Iridium phone via toll call to Chandler AZ ("two-stage dialing"):

1-480-768-2500, follow prompts to enter Iridium phone number

To an M4 phone directly as an International Call

011 + 870 + 76xxxxxxx (Mobile Number)

From an M4 or BGAN: [Note - Cannot call Toll-Free numbers]

To a US Phone number:

00 + 1 + (10-digit US phone number) + #

To an Iridium phone directly

00 + 8816xxxxxxx (Iridium Phone Number) + #

To an M4 phone directly

00 + 870 + 76xxxxxxx (Mobile Number) + #

From an Iridium provisioned commercially

To a US Phone number

00 + 1 + xxx.xxx.xxxx (US phone number)

To an Iridium phone directly

00 + 8816xxxxxxx (Iridium Phone Number)

To an M4 phone directly

00 + 870 + 76xxxxxxx (Mobile Number)

Test call - no airtime charge: 00 + 1 + 480.752.5105

From an Iridium provisioned by DOD

ISU (Iridium Subscriber Unit) to DSN

00 + 696 + (DSN Area Code) + (DSN 7-digit number)

ISU to U.S. Domestic

00 + 697 + (U.S. Area Code) + (7-digit US number)

ISU to International Long Distance (ILD)

00 + 698 + (Country Code) + ("National Destination Code" or

"City Code") + (Subscriber Number)

ISU to INMARSAT

00 + 698 + 870 + (INMARSAT subscriber number)

ISU to Local Hawaii

00 + 699 + (7-digit local commercial number)

1-800 toll-free 00 + 699 + 1 + 800 + (7-digits)

ISU to ISU, handset-to-handset

00 + (12-digit ISU subscriber number, e.g., 8816 763-xxxxx)

INMARSAT Country Code

All INMARSAT satellite telephones now use country code 870.

The Ocean Region Codes were discontinued January 1, 2009:

- 871 Atlantic Ocean Region East [AOR-East]
- 872 Pacific Ocean Region [POR]
- 873 Indian Ocean Region [IOR]
- 874 Atlantic Ocean Region West [AOR-West]

Inmarsat Customer Care Helpline - international direct dialing from USA to London, United Kingdom: 011 44 20 7728 1030

| INMARSAT-M Service Codes | | |
|--------------------------|-----------------------------------|--|
| 00 | Automatic Calls | |
| 11 | International Operator | |
| 12 | International Information | |
| 13 | National Operator | |
| 14 | National Information | |
| 17 | Telephone Call Booking | |
| 20 | Access to a Maritime PAD | |
| 23 | Abbreviated Dialing | |
| 24 | Post FAX | |
| 31 | Maritime Enquiries | |
| 32 | Medical Advice | |
| 33 | Technical Assistance | |
| 34 | Person-to-Person Call | |
| 35 | Collect Call | |
| 36 | Credit Card Call | |
| 37 | Time and Duration | |
| 38 | Medical Assistance | |
| 39 | Maritime Assistance | |
| 41 | Meteorological Reports | |
| 42 | Navigational Hazards and Warnings | |
| 43 | Ship Position Reports | |
| 57 | Retrieval of Mailbox Messages | |
| бх | Administration, Specialized Use | |
| 70 | Databases | |
| 91 | Automatic Line Test | |
| 911 | Emergency Calls | |
| 92 | Commissioning Tests | |

Wireless Priority Service (WPS)

https://www.dhs.gov/wireless-priority-service-wps

Authorized phones only; monthly and usage charges apply.

Dial *272 + destination number [send]

GETS - Govt. Emergency Telecomm. Service

http://www.dhs.gov/government-emergency-telecommunications-service-gets

User Assistance: 1-800-818-GETS, 1-703-818-GETS

GETS test #: 1-703-818-3924

GETS call from a commercial phone:

1-710-NCS-GETS (1-710-627-4387) 1-888-288-GETS (ATT)

1-800-900-GETS (Verizon) 1-800-257-8373 (Sprint)

Optional: specify long-distance carrier

1010+288 (ATT) 1-710-NCS-GETS

1010+222 (Verizon) 1-710-NCS-GETS

1010+333 (Sprint) 1-710-NCS-GETS

Listen for tone; enter PIN

At prompt, enter 10-digit destination number

GETS call from a rotary or pay phone:

Get outside line, listen for dial tone

Optional: specify long-distance carrier

ATT: 1010+288 Verizon: 1010+222 Sprint: 1010+333

Dial 1-710-NCS-GETS (627-4387)

Wait for GETS operator

Give your PIN and 10-digit destination number

| Text Messaging | | |
|---|--|--|
| Selected US & Canadian Cellular Text Messaging Carriers | | |
| "number" is the 10-digit mobile to | elephone number, unless 11-digit-number is specified | |
| Alltel | SMS: number@sms.alltelwireless.com MMS: number@mms.alltelwireless.com | |
| AT&T | SMS: number@txt.att.net MMS: number@mms.att.net | |
| Bell Canada | SMS & MMS: number@txt.bell.ca | |
| Boost Mobile | SMS: number@sms.myboostmobile.com MMS: number@myboostmobile.com | |
| C Spire Wireless | SMS & MMS: number@cspire.com | |
| Cricket Wireless | SMS: number@sms.mycricket.com MMS: number@mms.mycricket.com | |
| Metro PCS | SMS & MMS: number@mymetropcs.com or number@metropcs.sms.us | |
| Qwest | SMS & MMS: number@qwestmp.com | |
| SouthernLinc Wireless | SMS: number@page.southernlinc.com MMS: number@mms.southernlinc.com | |
| Sprint | SMS & MMS: number@messaging.sprintpcs.com | |
| T-Mobile | SMS & MMS: 11-digit-number@tmomail.net | |
| Continued | | |

| Text Messaging (continued) | | |
|-----------------------------------|--------------------------------------|--|
| Telus Communications | SMS & MMS: number@msg.telus.com | |
| TracFone | SMS & MMS: number@mmst5.tracfone.com | |
| U.S. Cellular | SMS: number@email.uscc.net | |
| | MMS: number@mms.uscc.net | |
| Verizon | SMS: number@vtext.com | |
| | MMS: number@vzwpix.com | |
| Virgin Mobile | SMS: number@vmobl.com | |
| | MMS: number@vmpix.com | |
| | Alaska | |
| Alaska Communications | SMS: number@txt.acsalaska.net | |
| | MMS: 11-digit-number@mms.ak.net | |
| General Communications Inc. (GCI) | SMS: number@mobile.gci.net | |
| | MMS: number@mms.gci.net | |
| Puerto Rico | | |
| Centennial Wireless | number@cwemail.com | |
| Claro | number@vtexto.com | |
| TracFone | number@mmst5.tracfone.com | |
| U.S. Virgin Islands | | |
| Centennial Wireless | number@cwemail.com | |
| TracFone | number@mmst5.tracfone.com | |
| Worldwide | | |
| Iridium | SMS: number@msg.iridium.com | |

Line-of-Sight Formulas

Visual Line-of-Sight

Approximate distance in miles = $1.33 \text{ x} \sqrt{\text{(height in feet)}}$

Radio Line-of-Sight

$$D = \sqrt{(2Hr)} + \sqrt{(2Ht)}$$

Where:

D = approximate distance (range) to radio horizon in miles

Hr = height of receive antenna in feet

Ht = height of transmit antenna in feet

| Range (miles) | Tx Ant. Height (ft) | Rx Ant. Height (ft) |
|------------------|------------------------|------------------------|
| 8 | 10 | 5.5 |
| 10 | 20 | 5.5 |
| 11 | 30 | 5.5 |
| 12 | 40 | 5.5 |
| 13 | 50 | 5.5 |
| 16 | 75 | 5.5 |
| 17 | 100 | 5.5 |

| Range (miles) | Tx Ant. Height (ft) | Rx Ant. Height (ft) |
|------------------|------------------------|------------------------|
| 21 | 150 | 5.5 |
| 23 | 200 | 5.5 |
| 28 | 300 | 5.5 |
| 32 | 400 | 5.5 |
| 35 | 500 | 5.5 |
| 42 | 750 | 5.5 |
| 48 | 1000 | 5.5 |

Notice to Airmen (NOTAM) Filing Instructions

File a Notice to Airmen (NOTAM) with the FAA to alert aircraft pilots of any hazards (such as a temporary tower or tethered antenna platform).

Filing Instructions:

- Before calling FAA have Tower Registration number or ASR number, which is the
 Indigit number assigned to the tower by the FCC; and the nearest airport to tower.
- 2. Call **1-877-4-US-NTMS (1-877-487-6867)** you will be prompted to enter state abbreviation (use letters on telephone keypad page 69) or to verbally indicate a state.
 - 3. Log the file number you will be given by the Flight Service Center attendant.
 - 4. NOTAMs are valid for 15 days and will expire unless a new NOTAM is filed.

When filing a NOTAM for the erection of obstacles near airfields **including temporary heliports** it may be helpful to have the latitude, longitude, height above ground level, and type of obstruction lighting used (steady red, flashing etc.)

NOTAMs are issued (and reported) for a number of reasons, such as:

- -hazards such as air-shows, parachute jumps, kite flying, lasers, rocket launches etc.
- -inoperable radio navigational aids
- -inoperable lights on tall obstructions
- -temporary erection of obstacles near airfields (e.g., cranes, portable towers)

FAA NOTAMs, ARTCC Notices, TFRs and Special Notices

https://pilotweb.nas.faa.gov/PilotWeb/

Defense Internet NOTAM Service

https://www.notams.faa.gov/dinsQueryWeb/

Other FAA telephone numbers:

Flight Service Stations: 1-800-WX-BRIEF (1-800-992-7433)

FAA Main Number: 1-866-TELL-FAA (1-866-835-5322)

COMMONLY USED FREQUENCIES Aviation Frequencies

121.5 Emergency & Distress

122.9 SAR Secondary and Training

123.1 SAR

122.925 – for use only for communications with or between aircraft when coordinating natural resources programs of Federal or State natural resources agencies, including forestry management and fire suppression, fish and game management and protection and environmental monitoring and protection.

| Typical Uses | Fixed Wing | Rotary Wing |
|---------------|------------|-------------|
| Air-to-Air | 122.750 F | |
| | 122.850 M | 122.850 M |
| | 122.925 M | 122.925 M |
| | 122.975 U | 122.975 U |
| | | 123.025 A |
| | 123.075 U | 123.075 U |
| Air-to-Ground | 122.850 M | 122.850 M |
| | 122.925 M | 122.925 M |
| | 122.975 U | 122.975 U |
| | | 123.025 A |
| | 123.075 U | 123.075 U |

A — Helicopter air-to-air, air traffic control operations.

 $F-Fixed-wing \ air-to-air. \qquad \qquad M-Multicom. \qquad \qquad U-Unicom.$

Ask FAA/FCC for emergency use of 123.3 or 123.5 (flight training).

All frequencies on this page use AM (emission designator 6K00A3E).

VHF Marine Channel Listing

This chart summarizes a portion of the FCC rules -- 47 CFR 80.371(c) and 80.373(f)

| Type of Message | Appropriate Channels * |
|--|--|
| DISTRESS SAFETY AND CALLING - Use this channel to get the attention of another station (calling) or in emergencies (distress and safety). | 16 |
| INTERSHIP SAFETY - Use this channel for ship-to-ship safety messages and for search and rescue messages to ships and aircraft of the Coast Guard. | 6 |
| COAST GUARD LIAISON - Use this channel to talk to the Coast Guard (but first make contact on Channel 16). | 22A |
| COAST GUARD - These channels are Coast Guard working channels, not available to commercial or non-commercial vessels for normal use. | 21A, 23A, 81A, 83A |
| U.S. Government - Environmental protection operations. | 81A |
| U.S. Government - This channel is a working channel for U.S. Government vessels and U.S. Government coast stations only. | 82A |
| NONCOMMERCIAL - Working channels for voluntary boats. Messages must be about the needs of the ship. Typical uses include fishing reports, rendezvous, scheduling repairs and berthing information. Use Channels 67 and 72 only for ship-to-ship messages. | 9 ⁶ , 67 ⁹ ,68, 69, 71 ⁸ , 72, 78A, 79A ⁴ , 80 ⁴ |

| Type of Message | Appropriate Channels * |
|---|--|
| COMMERCIAL - Working channels for working ships only. Messages must be about business or the needs of the ship. Use channels 8, 67, 72 and 88A only for ship-to-ship messages. | 1 ⁵ , 7A, 8, 9, 10, 11, 18A, 19A, 63 ⁵ , 67 ⁷ , 79A, 80A, 88A ¹ |
| PUBLIC CORRESPONDENCE (MARINE OPERATOR) - Use these channels to call the marine operator at a public coast station. By contacting a public coast station, you can make and receive calls from telephones on shore. Except for distress calls, public coast stations usually charge for this service. | 24, 25, 26, 27, 28, 84, 85, 86 |
| PORT OPERATIONS - These channels are used in directing the movement of ships in or near ports, locks or waterways. Messages must be about the operational handling movement and safety of ships. In certain major ports, Channels 11, 12 and 14 are not available for general port operations messages. Use channel 20 only for ship-to-coast messages. Channel 77 is limited to intership communications to and from pilots. | 1 ⁵ , 5 ³ , 12, 14, 20, 63 ⁵ , 65, 66, 73, 74, 75 ¹⁰ , 76 ¹⁰ , 77 |
| NAVIGATIONAL - (Also known as the bridge-to-bridge channel.) This channel is available to all ships. Messages must be about ship navigation, for example, passing or meeting other ships. You must keep your messages short. Your power output must not be more than one watt. This is also the main working channel at most locks and drawbridges. | 13, 67 |

| Type of Message | Appropriate Channels * | | |
|--|---------------------------|--|--|
| MARITIME CONTROL - This channel may be used to talk to ships and coast stations operated by state or local governments. Messages must pertain to regulation and control, boating activities, or assistance to ships. | 17 | | |
| DIGITAL SELECTIVE CALLING - Use this channel for distress and safety calling and for general purpose calling using only digital selective calling techniques. | 70 | | |
| WEATHER - On these channels you may receive weather broadcasts of the National Oceanic and Atmospheric Administration. These channels are only for receiving. You cannot transmit on them. | WX-1 through WX-7 | | |
| Footnotes | | | |
| 1. Not available in the Great Lakes, St. Lawrence Seaway, or the Puge the Strait of Juan de Fuca and its approaches. | t Sound and | | |
| 2. Only for use In the Great Lakes, St Lawrence Seaway, and Puget So Strait of Juan de Fuca and its approaches. | und and the | | |
| 3. Available only in the Houston and New Orleans areas. | | | |
| 4. Available only in the Great Lakes. 5. Available only in the New Orleans area. | | | |
| | | | |
| 7. Available only In the Puget Sound and the Strait of Juan de Fuca. | | | |

| Type of Message | Appropriate |
|-----------------|-------------|
| | Channels * |

- 8. Available for port operations communications only within the U.S. Coast Guard designated VTS radio protection area of Seattle (Puget Sound). Normal output must not exceed 1 watt.
- 9. Available for navigational communications only in the Mississippi River/ Southwest Pass/Gulf outlet area.
- 10. Available for navigation-related port operations or ship movement only. Output power limited to 1 watt.
 - * "A" indicates simplex use of the ship station transmit frequency of an international duplex channel. Used in U.S. waters only.

December 21, 2010 Adapted from http://wireless.fcc.gov/services/index.htm?job=service_bandplan&id=ship_stations

Shipboard repeaters: 457.525 457.550 457.575 457.600 MHz Inputs are +10.225 MHz (foreign vessels may use +10.0 MHz offset – not permitted in U.S. waters).

Maritime freqs. assignable to aircraft:

(HF) 2.738 2.830 3.023 4.125 5.680 MHz (VHF) channels 6 8 9 16 18A 22A 67 68 72 & 88A See 47CFR80.379 for restrictions.

Maritime Distress Frequencies - Radiotelephone

(HF, USB - 2K80J3E) 2182, 4125, 6215, 8291, 12290, 16420 kHz (VHF, FM wideband - 16K00F3E) 156.800 MHz (Channel 16)

VHF Marine Channels & Frequencies

Source: http://www.navcen.uscg.gov/?pageName=mtVhf

| Channel Ship Ship Number Transmit Receive Use | |
|--|-------------|
| | |
| * NAU NAU | wumber * |
| * MHz MHz 01A 156.050 156.050 Port Operations and Commercial, VTS. Avail able only in New Orleans/Lower Mississipp area | 01A |
| 05A 156.250 156.250 Port Operations or VTS in the Houston, New Orleans and Seattle areas | 05A |
| 6 156.300 156.300 Intership Safety | 6 |
| 07A 156.350 156.350 Commercial | 07A |
| 8 156.400 156.400 Commercial (Intership only) | 8 |
| 9 156.450 156.450 Boater Calling. Commercial and Non- Commercial | 9 |
| 10 156.500 156.500 Commercial | 10 |
| 11 156.550 156.550 Commercial. VTS in selected areas | 11 |
| 12 156.600 156.600 Port Operations. VTS in selected areas | 12 |
| 13 156.650 156.650 Intership Navigation Safety (Bridge-to-bridge). Ships >20m length maintain a listening watch on this channel in US waters | |

^{*&}quot;A" indicates simplex use of the ship station transmit frequency of an international duplex channel. Used in U.S. waters only.

| Channel Number * | Ship Transmit MHz | Ship Receive MHz | Use | |
|---|-------------------------|------------------------|---|--|
| 14 | 156.700 | 156.700 | Port Operations. VTS in selected areas. | |
| 15 | 1 | 156.750 | Environmental (Receive only). Used by Class C EPIRBs. | |
| 16 | 156.800 | 156.800 | International Distress, Safety and Calling. Ships required to carry radio, USCG, and most coast stations maintain a listening watch on this channel. | |
| 17 | 156.850 | 156.850 | State & Local Government Maritime Control | |
| 18A | 156.900 | 156.900 | Commercial | |
| 19A | 156.950 | 156.950 | Commercial | |
| 20 | 157.000 | 161.600 | Port Operations (duplex) | |
| 20A | 157.000 | 157.000 | Port Operations | |
| 21A | 157.050 | 157.050 | U.S. Coast Guard only | |
| 22A | 157.100 | 157.100 | Coast Guard Liaison and Maritime Safety Information Broadcasts. Broadcasts announced on channel 16. | |
| 23A | 157.150 | 157.150 | U.S. Coast Guard only | |
| 24 | 157.200 | 161.800 | Public Correspondence (Marine Operator) | |
| *"A" indicator simpley use of the chin station transmit frequency of an | | | | |

^{*&}quot;A" indicates simplex use of the ship station transmit frequency of an international duplex channel. Used in U.S. waters only.

| Channel Number * | Ship Transmit MHz | Ship Receive MHz | Use | |
|------------------------|-------------------------|------------------------|--|--|
| 25 | 157.250 | 161.850 | Public Correspondence (Marine Operator) | |
| 26 | 157.300 | 161.900 | Public Correspondence (Marine Operator) | |
| 27 | 157.350 | 161.950 | Public Correspondence (Marine Operator) | |
| 28 | 157.400 | 162.000 | Public Correspondence (Marine Operator) | |
| 63A | 156.175 | 156.175 | Port Operations and Commercial, VTS. Available only in New Orleans/Lower Mississippi area. | |
| 65A | 156.275 | 156.275 | Port Operations | |
| 66A | 156.325 | 156.325 | Port Operations | |
| 67 | 156.375 | 156.375 | Commercial. Used for bridge-to-bridge communications in lower Mississippi River. Intership only. | |
| 68 | 156.425 | 156.425 | Non-Commercial | |
| 69 | 156.475 | 156.475 | Non-Commercial | |
| 70 | 156.525 | 156.525 | Digital Selective Calling (voice communications not allowed) | |
| 71 | 156.575 | 156.575 | Non-Commercial | |
| 72 | 156.625 | 156.625 | Non-Commercial (intership only) | |
| * " N " : - 1: - + : | | | | |

^{*&}quot;A" indicates simplex use of the ship station transmit frequency of an international duplex channel. Used in U.S. waters only.

| Channel Number * | Ship Transmit MHz | Ship Receive MHz | Use |
|--|-------------------------|-----------------------------|---|
| 73 | 156.675 | 156.675 | Port Operations |
| 74 | 156.725 | 156.725 | Port Operations |
| 77 | 156.875 | 156.875 | Port Operations (intership only) |
| 78A | 156.925 | 156.925 | Non-Commercial |
| 79A | 156.975 | 156.975 | Commercial. Non-Commercial in Great Lakes only |
| 80A | 157.025 | 157.025 | Commercial. Non-Commercial in Great Lakes only |
| 81A | 157.075 | 157.075 | U.S. Government only - Environmental protection operations. |
| 82A | 157.125 | 157.125 | U.S. Government only |
| 83A | 157.175 | 157.175 | U.S. Coast Guard only |
| 84 | 157.225 | 161.825 | Public Correspondence (Marine Operator) |
| 85 | 157.275 | 161.875 | Public Correspondence (Marine Operator) |
| 86 | 157.325 | 161.925 | Public Correspondence (Marine Operator) |
| 87A | 157.375 | 157.375 | Public Correspondence (Marine Operator) |
| 88A 157.425 157.425 Commercial, intership on | | Commercial, intership only. | |
| * "A" indicates simplex use of the ship station transmit frequency of an | | | |

^{*&}quot;A" indicates simplex use of the ship station transmit frequency of an international duplex channel. Used in U.S. waters only.

| Channel | Ship | Ship | | |
|---------|----------|-------------|---------------------------------------|--|
| Number | Transmit | Receive Use | | |
| * | MHz | MHz | | |
| AIS 1 | 161.975 | 161.975 | Automatic Identification System (AIS) | |
| AIS 2 | 162.025 | 162.025 | Automatic Identification System (AIS) | |

^{* &}quot;A" indicates simplex use of the ship station transmit frequency of an international duplex channel. Used in U.S. waters only.

Shipboard repeaters:

457.525 457.550 457.575 457.600 MHz, wideband FM. Inputs are +10.225 MHz
Foreign vessels may use +10.0 MHz offset outside U.S. waters.

On-board Communications:

Narrowband FM: 457.5375, 457.5625, 467.5375, 467.5625 MHz

Maritime freqs. assignable to aircraft:

(HF) 2.738 2.830 3.023 4.125 5.680 MHz (VHF) channels 6 8 9 16 18A 22A 67 68 72 & 88A See 47CFR80.379 for restrictions.

Maritime Distress Frequencies - Radiotelephone

(HF, USB - 2K80J3E) 2182, 4125, 6215, 8291, 12290, 16420 kHz (VHF, FM wideband - 16K00F3E) 156.800 MHz (Channel 16)

Multi-Use Radio Service (MURS)

151.820 MHz

151.880 MHz

151.940 MHz

154.570 MHz (shared with business band)

154.600 MHz (shared with business band)

Maximum power output 2 watts.

Narrowband on 151 MHz frequencies.

Narrowband or wideband on the 154 MHz frequencies.

External gain antennas may be used (must be no more than 60 feet above ground or 20 feet above the structure on which it is mounted).

Voice or data, except:

no store-and-forward packet operation no continuous carrier operation no interconnection with the public switched network no use aboard aircraft in flight

Authorized emission types:

A1D, A2B, A2D, A3E, F2B, F1D, F2D, F3E, G3E.

Personal or business use.

Equipment must be certificated per FCC rules Part 95, Subpart J.

No license required.

GMRS Frequencies

Authorized bandwidth: 20 kHz. Repeater outputs (inputs are +5 MHz):

462.550 462.575 462.600 462.625 462.650 462.675* 462.700 462.725

* nationwide traveler's assistance; if CTCSS is required, try 141.3 Hz.

Simplex prohibited on repeater inputs.

Interstitial frequencies (simplex, not more than 5 watts):

462.5625 .5875 .6125 .6375 .6625 .6875 .7125 (shared with FRS)

North of Line A / West of Line C: 462.650, 467.650, 462.700, 467.700 may not be used; small control stations limited to 5 watts.

FRS Frequencies

Authorized bandwidth: 12.5 kHz. Channels 1-14:

462.5625 /5875 /6125 /6375 /6625 /6875 /7125 (shared with GMRS)

467.5625 /5875 /6125 /6375 /6625 /6875 /7125

CB Frequencies

| Ch | MHz | Ch | MHz | Ch | MHz | Ch | MHz | Ch | MHz |
|----|---------------------------|----|--------|----|--------|----|--------|----|--------|
| 1 | 26.965 | 2 | 26.975 | 3 | 26.985 | 4 | 27.005 | 5 | 27.015 |
| 6 | 27.025 | 7 | 27.035 | 8 | 27.055 | 9 | 27.065 | 10 | 27.075 |
| 11 | 27.085 | 12 | 27.105 | 13 | 27.115 | 14 | 27.125 | 15 | 27.135 |
| 16 | 27.155 | 17 | 27.165 | 18 | 27.175 | 19 | 27.185 | 20 | 27.205 |
| 21 | 27.215 | 22 | 27.225 | 23 | 27.255 | 24 | 27.235 | 25 | 27.245 |
| 26 | 27.265 | 27 | 27.275 | 28 | 27.285 | 29 | 27.295 | 30 | 27.305 |
| 31 | 27.315 | 32 | 27.325 | 33 | 27.335 | 34 | 27.345 | 35 | 27.355 |
| 36 | 27.365 | 37 | 27.375 | 38 | 27.385 | 39 | 27.395 | 40 | 27.405 |
| * | 26.995 | * | 27.045 | * | 27.095 | * | 27.145 | * | 27.195 |
| | * Remote Control Channels | | | | | | | | |

Common Business Frequencies

IS=Special Industrial IB=Business

| 27.49 | IB | ltinerant |
|----------|----|--------------------------------|
| 35.04 | IB | ltinerant |
| 43.0400 | IS | ltinerant |
| 151.5050 | IS | ltinerant |
| 151.6250 | IB | RED DOT Itinerant |
| 151.9550 | IB | PURPLE DOT |
| 152.8700 | IS | ltinerant |
| 154.5700 | IB | BLUE DOT (also MURS) |
| 154.6000 | IB | GREEN DOT (also MURS) |
| 158.4000 | IS | ltinerant |
| 451.8000 | IS | ltinerant |
| 456.8000 | IS | ltinerant |
| 464.5000 | IB | BROWN DOT Itinerant 35w. |
| 464.5500 | IB | YELLOW DOT Itinerant 35w. |
| 467.7625 | IB | J DOT |
| 467.8125 | IB | K DOT |
| 467.8500 | IB | SILVER STAR |
| 467.8750 | IB | GOLD STAR |
| 467.9000 | IB | RED STAR |
| 467.9250 | IB | BLUE STAR |
| 469.5000 | IB | Simplex or input to 464.500 if |
| | | repeater. Itinerant 35 w. max |
| 469.5500 | IB | Simplex or input to 464.550 if |
| | | repeater. Itinerant 35 w. max |
| | | |

Railroad Frequencies

160.215(ch.7)-161.565(ch.97), every 15 kHz Interstitial narrowband channels between ch. 2-97 are offset 7.5 kHz.

161.205 Railroad Police Mutual Aid

(Wideband: channel 73; narrowband: channel 073)

Ch. 2-6 are used in Canada only:

159.810 159.930 160.050 160.185 160.200

452.325 / 457.325

452.375 / 457.375

452.425 / 457.425

452,475 / 457,475

452.775 / 457.775

452.825 / 457.825

452.875 / 452.875

452.900 / 457.900

452.8500

452.8375 - low power

452.8625 - low power

452.8875 - low power

(telemetry / remote control / remote indicator frequencies omitted)

SAR (Search And Rescue) Frequencies

Land SAR

Typical freqs. are: 155.160, .175, .205, .220, .235, .265, .280, or .295 If CTCSS is required try 127.3 Hz (3A).

Air SAR

3023, 5680, 8364 kHz upper sideband (lifeboat/survival craft),

4125 kHz upper sideband (distress/safety with ships and coast stations)

121.5 MHz emergency and distress

122.9 MHz SAR secondary & training

123.1 MHz SAR primary

Water SAR

156.300 (VHF Marine ch. 06) Safety and SAR

156.450 (VHF Marine ch. 09) Non-commercial supplementary calling

156.800 (VHF Marine ch. 16) DISTRESS and calling

156.850 (VHF Marine ch. 17) State & Local Government Maritime Control

157.100 (VHF Marine ch. 22A) Coast Guard Liaison

VHF Marine Channels

6, 9, 15, 16, 21A, 22A (USCG Liaison), 23A, 81A, 83A

USCG Auxiliary

138.475, 142.825, 143.475, 149.200, 150.700

USCG/DOD Joint SAR

345.0 MHz AM initial contact, 282.8 MHz AM working

Military SAR

40.50 wideband FM US Army/USN SAR

138.450 AM, 138.750 AM USAF SAR

Maritime HF and VHF Distress Frequencies

Global Maritime Distress & Safety System, Digital Selective Calling (DSC) & Radiotelephone Channels - **for use only by vessels and coast stations authorized in the Maritime Services** (FCC Part 80, NTIA 7.5 and 8.2.29). These are <u>not</u> nationwide interoperability channels, and are <u>not</u> for land-based public safety agencies. These frequencies may be programmed only into radios certificated for Part 80 operations, and only by a person holding a First or Second Class Radiotelegraph Operator's Certificate, Radiotelegraph Operator License, or General Radiotelephone Operator License.

The simplex DSC frequencies except 2187.5 and 16804.5 kHz are monitored by the US Coast Guard and are used for digital alerting and calling for distress, urgency and safety. Once the DSC call has been sent, the corresponding radiotelephone frequency is used for voice communications.

The simplex voice frequencies are used for distress and safety communications, and except for 2182 and 16420 kHz are monitored by the USCG. Frequencies are monitored according to propagation; not all frequencies are monitored at all times. These radiotelephone channels use upper sideband (USB - 2K80J3E); the frequency shown is the suppressed carrier reference frequency. VHF channel 16 uses wideband FM (16K0F3E or 16K0G3E).

| DSC | Voice | |
|--|--------------------------|--|
| * 2187.5 kHz | * 2182 kHz | |
| 4207.5 kHz | 4125 kHz | |
| 6312.0 kHz | 6215 kHz | |
| 8414.5 kHz | 8291 kHz | |
| 12577.0 kHz | 12290 kHz | |
| * 16804.5 kHz | * 16420 kHz | |
| 156.525 MHz (Channel 70) | 156.800 MHz (channel 16) | |
| * International distress channel that is not monitored by USCG | | |

HF Disaster Communications

| Fixed, Base, Mobile | | Fix | ed |
|---------------------|---|------|------|
| 2326 | I | 5135 | А |
| 2411 | | 5140 | A, I |
| 2414 | | 5192 | I |
| 2419 | | 5195 | I |
| 2422 | | 7477 | Α |
| 2439 | | 7480 | A |
| 2463 | | 7802 | D |
| 2466 | | 7805 | [|
| 2471 | | 7932 | |
| 2474 | | 7935 | C, D |
| 2487 | | | |
| 2511 | | | |
| 2535 | | | |
| 2569 | | | |
| 2587 | | | |
| 2801 | | | |
| 2804 | A | | |
| 2812 | | | |

- Carrier frequencies in kHz. A= Alternate channel I=Interstate coordination
 C=Conterminous US D=Daytime Operations Only
- May be licensed only to the central governments of the 50 States and 6 US territories. See FCC rules 90.264, 90.20(d)(6), and 90.129(m).
- Emissions: Only 2K80J3E (USB), 100HA1A and those emission types listed in \$90.237(g) are permitted.

HF Long Distance Communications

| Fixed, Base, Mobile | | Fixed (including itinerant) | | | |
|---------------------|---|-----------------------------|-----|--------|---|
| 2289 | | 5046.6 | E | 7480.1 | |
| 2292 | | 5052.6 | E | 7483.1 | |
| 2395 | | 5055.6 | E | 7486.1 | E |
| 2398 | | 5061.6 | W | 7549.1 | D |
| 3170 | | 5067.6 | | 7552.1 | |
| 4538.6 | N | 5074.6 | E | 7555.1 | W |
| 4548.6 | N | 5099.1 | | 7558.1 | W |
| 4575 | | 5102.1 | | 7559.1 | W |
| 4610.5 | | 5313.6 | | 7562.1 | W |
| 4613.5 | | | | 7697.1 | |
| 4634.5 | | 6800.1 | N | | |
| 4637.5 | | 6803.1 | | | |
| 4647 | | 6806.1 | W | | |
| | | 6855.1 | N,M | | |
| | | 6858.1 | N | | |
| | | 6861.1 | W | | |
| | | 6885.1 | N | | |
| | | 6888.1 | N | | |

- Carrier frequencies in kHz.
- D=Daytime Operations Only, N=Night Operations Only, E=East of 108° West Longitude (WL), M= West of the Mississippi River, W=West of 90° WL.
- May be licensed for repair of telecommunications circuits, power & pipeline distribution etc. See FCC rules 90.266, 90.35(c)(1), and 90.129(o).
- Emissions: Only 2K80J3E (USB), 100HA1A, 100HA1B, and those emission types listed in §90.237(q) are permitted.

Standard Time and Frequency Broadcasts

Radio station WWV (Fort Collins, Colorado), WWVH (Kauai, Hawaii), and CHU (Ontario, Canada) broadcast continuous time signals on precise frequencies. Because the broadcasts occur simultaneously on several HF frequencies at high power, at least one of the signals should be receivable at all times throughout the US and Canada. This can be useful for testing HF receivers and antennas, and for selecting frequencies based on currently observable propagation.

| Frequencies (MHz) | | | |
|--------------------|--------------------|--------------------|--|
| WWV | WWVH | CHU | |
| 2.500 | 2.500 | 3.330 | |
| 5.000 | 5.000 | 7.850 | |
| 10.000 | 10.000 | 14.670 | |
| 15.000 | 15.000 | | |
| 20.000 | | | |
| Double Sideband AM | Double Sideband AM | Full Carrier USB | |
| Male Voice | Female Voice | English and French | |

Standard Time by Telephone

1-303-499-7111 - WWV (Colorado)

1-808-335-4363 - WWVH (Hawaii)

1-202-762-1401, 1-202-762-1069 (DSN 762-1401, 762-1069) - Washington, DC

1-719-567-6742 (DSN 560-6742) - Colorado Springs, CO

The Washington DC and Colorado Springs CO lines alternate between local (EST/EDT or MST/MDT) and UTC (Z) time.

Amateur Radio Emergency Frequencies

These frequencies (except 5167.5 kHz) are not available for licensing to Public Safety agencies. An Amateur Radio Operator License of the appropriate class is required in order to transmit on these frequencies.

Emergency Center of Activity Frequencies - emergency communications networks in North/Central/South America and the Caribbean are encouraged to establish their operations within 20 kHz +/- of these frequencies (kHz):

| 3750 or 3 | 3985 LSB | 7060, 7240, or 7290 LSB | | |
|-----------|----------|-------------------------|-----------|--|
| 14300 USB | 18160 | 0 USB | 21360 USB | |

US Government stations and RACES stations may exchange emergency communications on any Amateur frequency. DHS (including FEMA) and USCG stations, among others, have frequency authorizations aligned with the five Amateur Service secondary channels at 5 MHz:

| Carrier Frequency (kHz) | Center Frequency (kHz) | |
|-------------------------|------------------------|--|
| 5330.5 | 5332.0 | |
| 5346.5 | 5348.0 | |
| 5357.0 | 5358.5 | |
| 5371.5 | 5373.0 | |
| 5403.5 | 5405.0 | |

Alaska Emergency Frequency - 5167.5 kHz USB carrier frequency, 5168.9 kHz assigned (center) frequency - may be used in or within 50 nautical miles of Alaska for emergency communications, including exercises. Interoperability with Part 90 Private Land Mobile Radio Service stations is authorized.

(continued)

Amateur Radio Emergency Frequencies (continued)

Automatic Link Establishment (ALE) http://hflink.net

Emergency/Disaster Relief Interoperation Voice Channels (kHz, USB*):

| Netcall: HFL | | |
|--------------|---------|--|
| 3791.0 | 14346.0 | |
| 3996.0 | 18117.5 | |
| 5371.5 | 21432.5 | |
| 7185.5 | 24932.0 | |
| 7296.0 | 28312.5 | |

Text Message Channels (kHz, USB*):

| Netcall: HFN | | |
|--------------|---------|--|
| 3596.0 | 18106.0 | |
| 7102.0 | 21096.0 | |
| 10145.5 | 24926.0 | |
| 14109.0 | 28146.0 | |

^{*} Carrier reference frequency (center of ALE signal is offset +1625 Hz)

Maritime Mobile Service Net (and others): 14300 kHz USB http://14300.net Hurricane Watch Net: 14325 kHz USB http://www.hwn.org

National Hurricane Center, during hurricanes (kHz):

| 14325 USB - prim | ary | 720 | 68 LSB - alternate |
|----------------------|--------------|---------------|--------------------------|
| 3815 LSB - Caribbean | 3950 LSB - N | lorth Florida | 3940 LSB - South Florida |

http://www.wx4nhc.org IRLP Node: 9219, EchoLink Conference: Wx-Talk


Amateur Radio Calling Frequencies


| Frequency (MHz) | Mode |
|-----------------|---------|
| 29.6 | FM |
| 50.125 | USB |
| 52.525 | FM |
| 144.2 | USB |
| 144.39 | FM-APRS |
| 146.52 | FM |
| 223.5 | FM |
| 432.1 | USB |
| 446.0 | FM |
| 927.5 | FM |
| 1294.5 | FM |


These are not Public Safety frequencies - an Amateur Radio Operator license is required to use them.


Amateur Radio Repeater Coordinators


http://nfcc.us/index.php/nfcc-coordinators

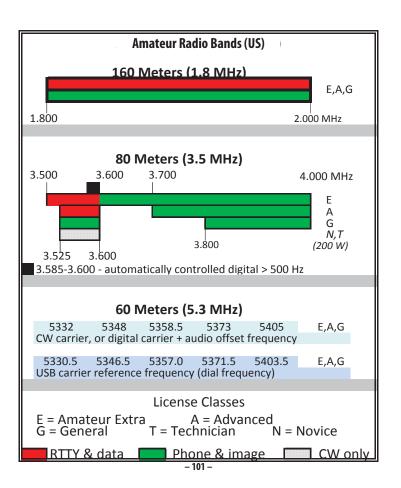


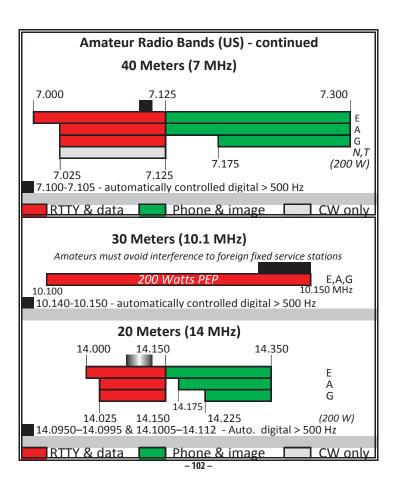

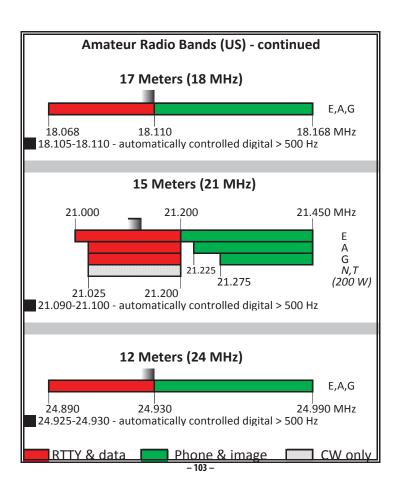

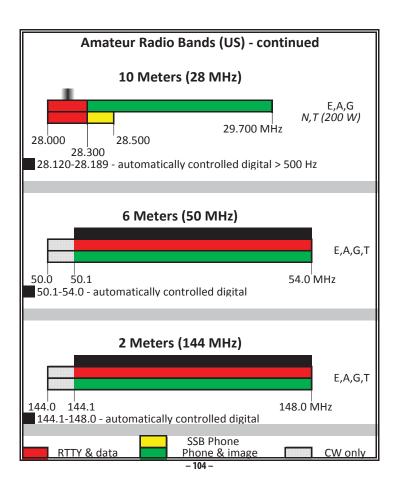

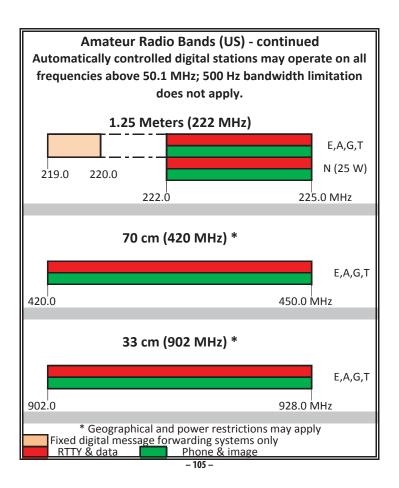

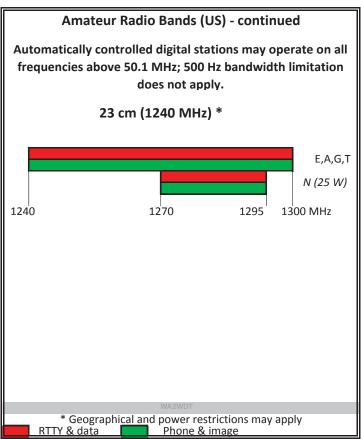

Amateur Radio Bands (US) - continued

| All licensees except Novice are authorized all modes on the following frequencies: | | | | |
|--|-------------------|--|--|--|
| 2300-2310 MHz | 47.0-47.2 GHz | | | |
| 2390-2450 MHz | 76.0-81.0 GHz | | | |
| 3300-3500 MHz | 122.25-123.0 GHz | | | |
| 5650-5925 MHz | 134-141 GHz | | | |
| 10.0-10.5 GHz | 241-250 GHz | | | |
| 24.0-24.25 GHz | All above 275 GHz | | | |

Amateur Radio Power Limits (US)


FCC Rule 97.313


- (a) An amateur station must use the minimum transmitter power necessary to carry out the desired communications.
- (b) No station may transmit with a transmitter power exceeding 1.5 kW PEP.


[60 meters: 100W PEP ERP; 30 meters: 200W PEP; additional restrictions apply under certain conditions, and to Novice and Technician licensees.]

| | | |
|------|------|--|
| | | |
| | | |
| | | |
| | | |

| | | |
|------|------|--|
| | | |
| | | |
| | | |
| | | |

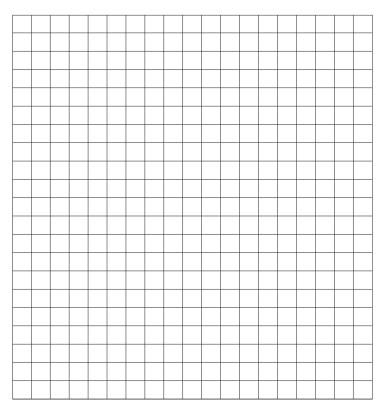

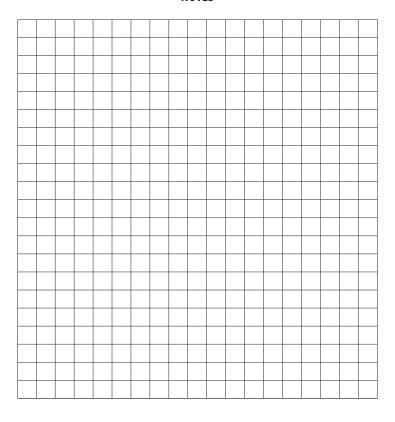

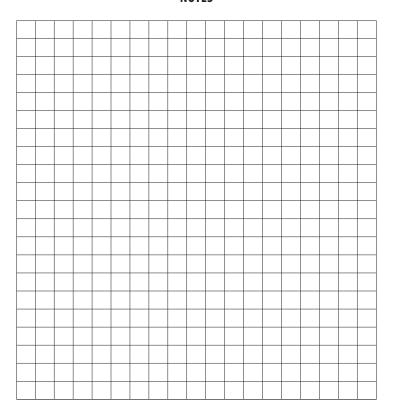

To download or request copies of the NIFOG, please visit http://publicsafetytools.info







Homeland Security

For sale by the Superintendent of Documents, U.S. Government Printing Office Internet: bookstore.gpo.gov Phone: toll free (866) 512-1800;
DC area (202) 512-1800 Fax: (202) 512-2104

Mail: Stop IDCC, Washington, DC 20402-0001